










75 x 300mm 53812 (gloss wall) 53813 (matt wall)

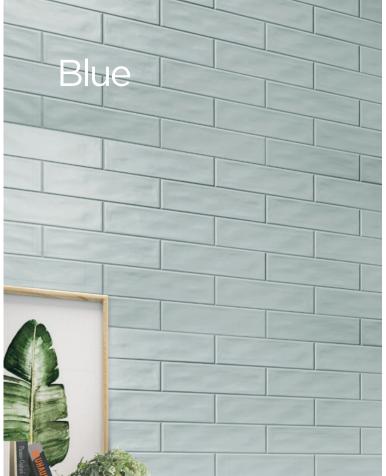



75 x 300mm 51768 (gloss wall)









75 x 300mm 52253 (gloss wall)












75 x 300mm 53811 (gloss wall)



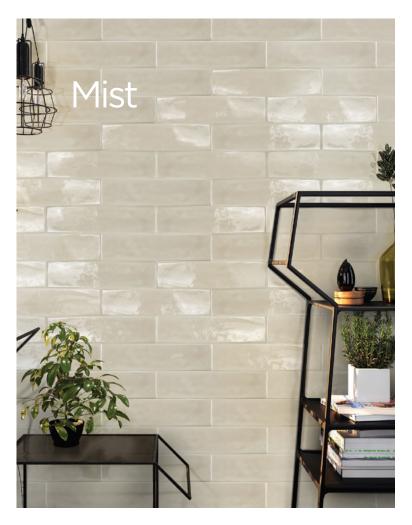




75 x 300mm 51640 (gloss wall)







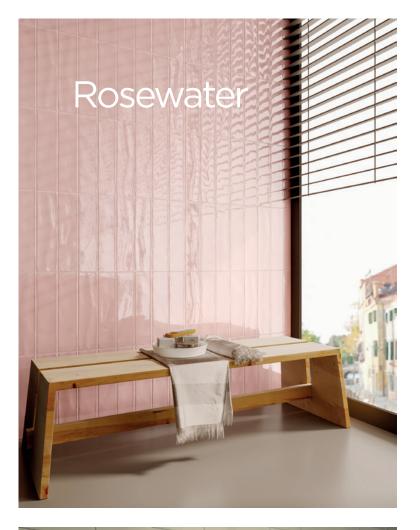









75 x 300mm 51642 (gloss wall)



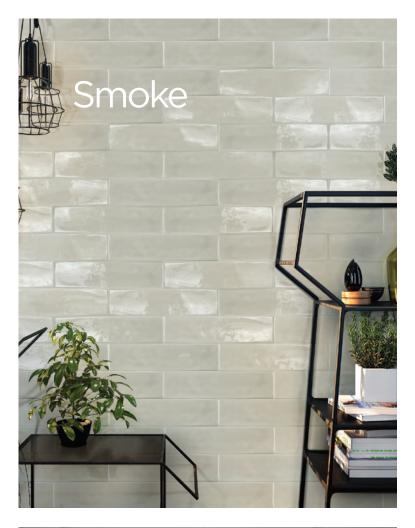



75 x 300mm 51641 (gloss wall)

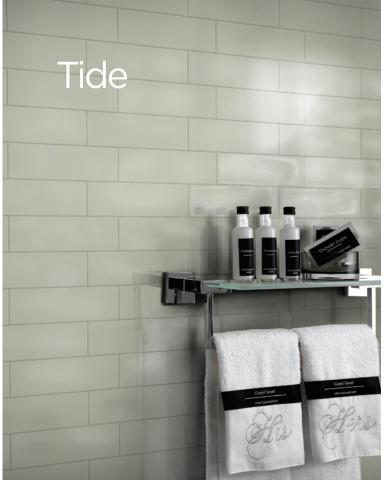



75 x 300mm 51644 (gloss wall)





75 x 300mm 53808 (gloss wall)

Technical Specification

| | Properties | Test Method | Required Value | Value | Applies to |
|---|-----------------------------|-------------|--------------------|-------------------|------------|
| | Water absorption | ASTM C373 | ≤ 20.0% | ≤ 16.7% | Full range |
| | Determination of dimensions | ASTM C499 | Thickness ≤ 0.79mm | Thickness ≤ 0.5mm | Full range |
| | Breaking strength | ASTM C648 | ≥ 550 N | ≥ 1340 N | Full range |
| 0 | Abrasion resistance | ASTM C1027 | As reported | Class 3 | Full range |
| | Chemical resistance | ASTM C650 | Class B min. | Class A | Full range |
| | Origin | N/A | N/A | China | Full range |
| | Shade variation | N/A | N/A | V1 | Full range |



Packing Information

| Tile description | | Quantity per box | Quantity per m2 | | Quantity per pallet | |
|------------------|---------------|------------------|-----------------|----------|---------------------|-------|
| Size (mm) | Texture | Pieces | Pieces | Weight | m2 | boxes |
| 75 x 300 | Matt Gloss | 44 | 44.44 | 18.00 kg | 79.20 | 80 |

