

Aquitaine

Our Aquitaine range creates the look of travertine without its associated maintenance. Made in Italy, these glazed porcelain tiles are indistinguishable from the real product, easy to clean, require no sealing and offer superior performance. This versatile product is perfect for internal and external applications as well as wet areas. Available in three colourways (beige, grigio and silver), and two sizes of 408mm x 614mm and French Pattern.

AQUITAINE

COLOURS, FORMATS & FINISHES



Matt | P4

	Beige	Grigio	Silver
400 x 600mm	●	●	●
French Pattern	●	●	●

Textured | P5

	Beige	Grigio	Silver
400 x 600mm	●	●	●
French Pattern	●	●	●


FINISH: **MATT** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: UNRECTIFIED | V RATING: V4
FINISH: **TEXTURED** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: UNRECTIFIED | V RATING: V4





Beige


V4
P4 P5



408 x 614mm
50512 (matt)
50513 (textured)




French Pattern
50514 (matt)
50515 (textured)

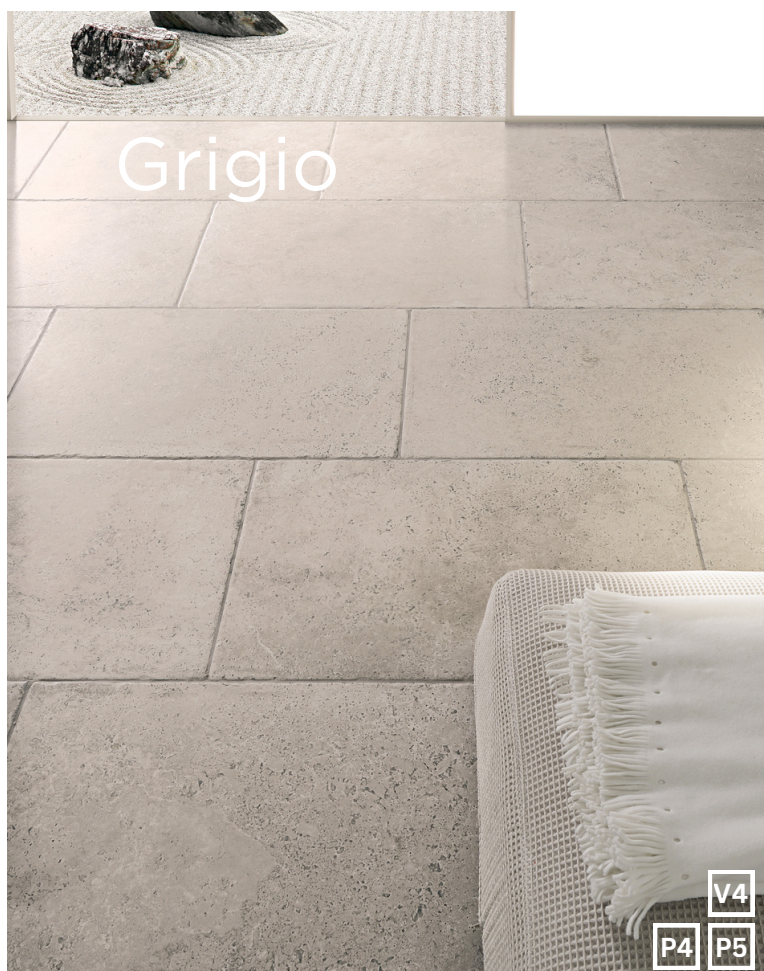

Grigio


V4
P4 P5



408 x 614mm
50517 (matt)
50518 (textured)



French Pattern
50519 (matt)
50520 (textured)



408 x 614mm
53932 (matt)
53830 (textured)




French Pattern
53886 (matt)
53831 (textured)



Technical Specifications - New

Properties	Test Method	Required Value	Value	Applies to
 Water absorption	ISO 10545-4	≥ 1300 N	Complies with standards	Full range
 Determination of dimensions	ISO 10545-2	Length and width $\pm 0.6\%$ Thickness $\pm 5.00\%$ Edge straightness $\pm 0.5\%$ Surface flatness $\pm 0.5\%$	Length and width $\pm 0.6\%$ Thickness $\pm 5.00\%$ Edge straightness $\pm 0.5\%$ Surface flatness $\pm 0.5\%$	Full range
 Breaking strength	ISO 10545-4	≥ 35 N/mm	40.75 N/mm	Full range
 Modulus of rupture	ISO 10545-4	≥ 35 N/mm	≥ 40.75 N/mm	Full range
 Abrasion resistance	ISO 10545-7	N/A	Class 4 (6000 rotations)	Full range
 Slip resistance (wet pendulum test)	Wet Pendulum Test	N/A	P4 – Matt P5 – Textured	Matt Textured
 Slip resistance (oil wet ramp test)	DIN 51130	N/A	R9 – Natural R11 – Textured	Natural, Textured
 Chemical resistance	ISO 10545-13	Min. UB	Compliant	Full range
 Stain resistance	ISO 10545-13	Min class 3	Class 5	Full range
 Origin	N/A	N/A	Italy	Full range
 Shade variation	N/A	N/A	V2	Full range

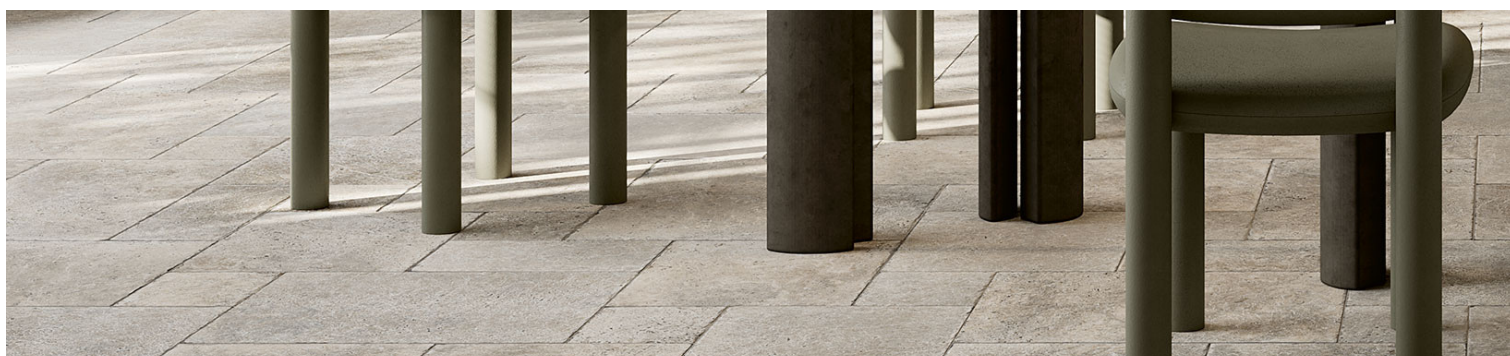

Packing Information

Tile Description		Quantity per Box	Quantity per m2		Quantity per Pallet	
Size (mm)	Finish	Pieces	Pieces	Weight	m2	Boxes
French Pattern	Matt Textured	6	8.00	20.11kg	33.00	44
408 x 614	Matt Textured	5	3.99	20.11kg	60.14	48

INSTALLATION INSTRUCTIONS

We recommend wet cutting or the score and snap method during installation. Improper installation techniques may expose installers to harmful silica dust. Do not dry cut this product using power tools during installation, as dry cutting may present a risk of serious lung injury. If adequate ventilation cannot be achieved, wear an appropriate mask or respirator. For more information, see the SDS: <https://www.coem.it/downloads/>

BOX CONTENTS

All materials are packed in one box.
Two boxes are required to complete one module.

40,8x61,4 - 16"x24"	1 pc
40,8x40,8 - 16"x16"	2 pcs
20,3x40,8 - 8"x16"	1 pc
20,3x20,3 - 8"x8"	2 pcs
Total Sqm.	0,75



The data and information contained in these specification sheets are indicative only unless stated otherwise. As ColorTile cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.