

Silver







175 x 500mm 51124 (satin)



175 x 500mm 51126 (satin)

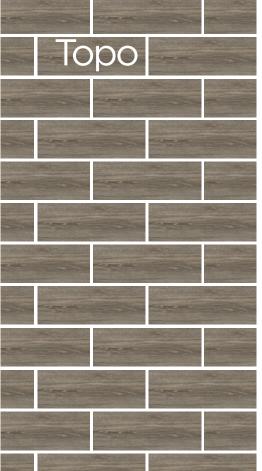





Technical Specification

	Properties	Test Method	Required Value	Value	Applies to
	Water absorption	UNE-ISO-10545-3	≤ 0.6%	≤ 3%	Full range
Î	Determination of dimensions	UNE-ISO-10545-2	Length and width ± 0.6% Thickness ± 5.00% Edge straightness ± 0.5% Surface flatness ± 5%	Length and width ± 0.11% Thickness ± 2.22% Edge straightness ± 0.4% Surface flatness ± 5%	Full range
	Breaking strength	UNE-ISO 10545-4	≥ 22N/mm2	36N/mm2	Full range
0	Abrasion resistance	ISO 10545-7	N/A	PEI 3	Full range
	Slip resistance (wet pendulum test)	AS 4586:2013	N/A	P1	Satin
	Chemical resistance	UNE-ISO-10545-13	GB min.	GA,GLA,GHA	Full range
	Stain resistance	UNE-ISO-10545-14	Minimum class 3	Class 5	Full range
	Origin	N/A	N/A	Spain	Full range
	Shade variation	N/A	N/A	V2	Full range



Packing Information

Tile description		Quantity per box	Quantity per m2		Quantity per pallet	
Size (mm)	Texture	Pieces	Pieces	Weight	m2	boxes
175 x 500	Matt	15	11.45	19.08 kg	62.88	48



As ColorTile cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation.

The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose.

To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet.

No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.

