




## **Technical Specification**

	Properties	Test Method	Required Value	Value	Applies to
	Water absorption	GB/T 4100-2015	> 10	AVG 16.2	Full range
	Breaking strength	GB/T 4100-2015	> 350 N	420 N	Full range
o V	Modulus of rupture	GB/T 4100-2015	Minimum 12 Mpa	16 MPa	Full range
	Abrasion resistance	GB/T 4100-2015	Class 3 min	Complies with standards	Full range
	Chemical resistance	GB/T 4100-2015	GB min.	GA Level	Full range
	Stain resistance	GB/T 4100-2015	Class 3 min	Class 5 Level	Full range
	Origin	N/A	N/A	China	Full range
	Shade variation	N/A	N/A	V1	Full range



## **Packing Information**

Tile description		Quantity per box	Quantity per m2		Quantity per pallet	
Size (mm)	Texture	Pieces	Pieces	Weight	m2	boxes
75 x 150	Gloss	136	88.89	15.00 kg	110.16	72

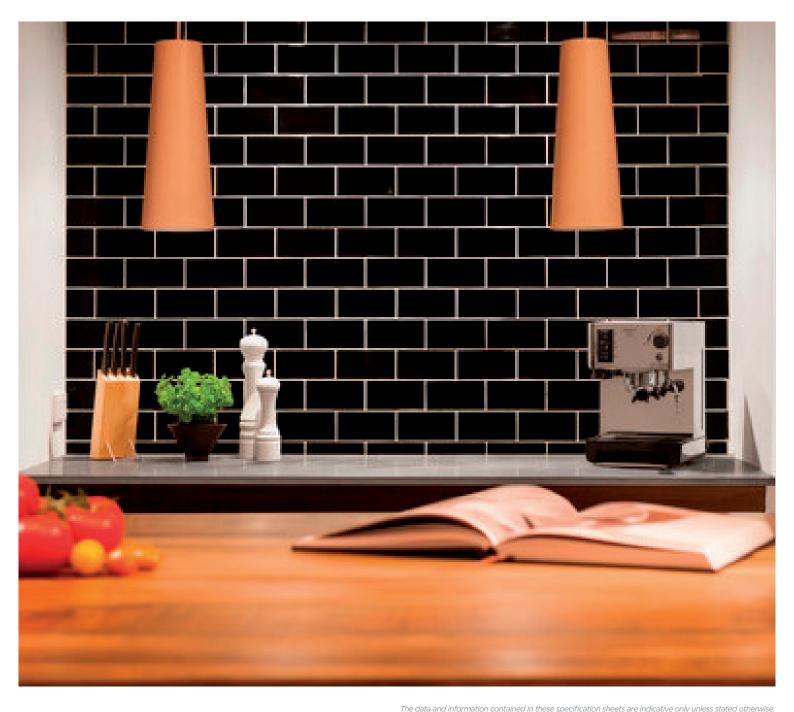

As ColorTile cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose.

To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet.

No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.

