





Louise

LOUISE

COLOURS, FORMATS & FINISHES

					
Honed	White	Naturale	Terra	Grigio	Nero
600 x 1200mm	•	•		•	
600 x 600mm	•	•	•	•	•
300 x 600mm	•	•	•	•	•
300 x 300mm	•	•	•	•	•
73 x 298mm	•	•	•	•	•
In/Out P4					
600 x 600mm	•	•	•	•	•

FINISH: **HONED** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: RECTIFIED | V RATING: V3
FINISH: **IN/OUT** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: RECTIFIED | V RATING: V3




Colour variation is an inherent property of all kiln-fired products. Tiles supplied may vary from samples provided. All slip ratings are provided subject to the guidelines outlined in our terms and conditions.


White



V3
P4



600 x 600mm
52868 (honed)
54638 (in/out)

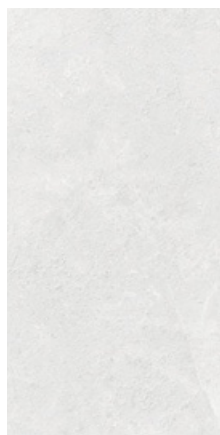


600 x 1200mm
53269 (honed)



73 x 298mm
52869 (honed)



300 x 300mm
52865 (honed)




300 x 600mm
52866 (honed)


Naturale




V3
P4




600 x 600mm
52589 (honed)
54633 (in/out)

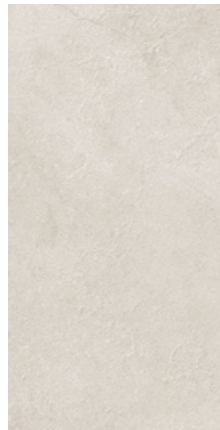


600 x 1200mm
53266 (honed)



73 x 298mm
52593 (honed)



300 x 300mm
52591 (honed)



300 x 600mm
52590 (honed)

Terra




V3

P4



73 x 298mm
52603 (honed)



300 x 300mm
52601 (honed)



300 x 600mm
52600 (honed)



600 x 600mm
52599 (honed)
52937 (in/out)

Grigio



V3

P4




600 x 600mm
52594 (honed)
52934 (in/out)




600 x 1200mm
53265 (honed)



73 x 298mm
52598 (honed)



300 x 300mm
52596 (honed)




300 x 600mm
52595 (honed)


Nero




73 x 298mm
52608 (honed)



300 x 300mm
52606 (honed)




300 x 600mm
52605 (honed)




600 x 600mm
52604 (honed)
54636 (in/out)



Technical Specifications

Properties	Test Method	Required Value	Value	Applies to
 Water absorption	ASTM C373	$\leq 0.5\%$	$\leq 0.11\%$	Full range
 Breaking strength	ASTM C648	≥ 1100 N	≥ 2143 N	Full range
 Abrasion resistance	ASTM C1027	As reported	Class 3	Full range
 Slip resistance (wet pendulum test)	AS 4586:2013	N/A	P4 - In/Out P5 - Textured	In/Out, Textured
 Slip resistance (oil wet ramp test)	AS 4586:2013	N/A	N/A	Full range
 Chemical resistance	ASTM C650	As reported	Class A	Full range
 Stain resistance	ASTM C1378	As reported	Class A	Full range
 Origin	N/A	N/A	China	Full range
 Shade variation	N/A	N/A	V3	Full range

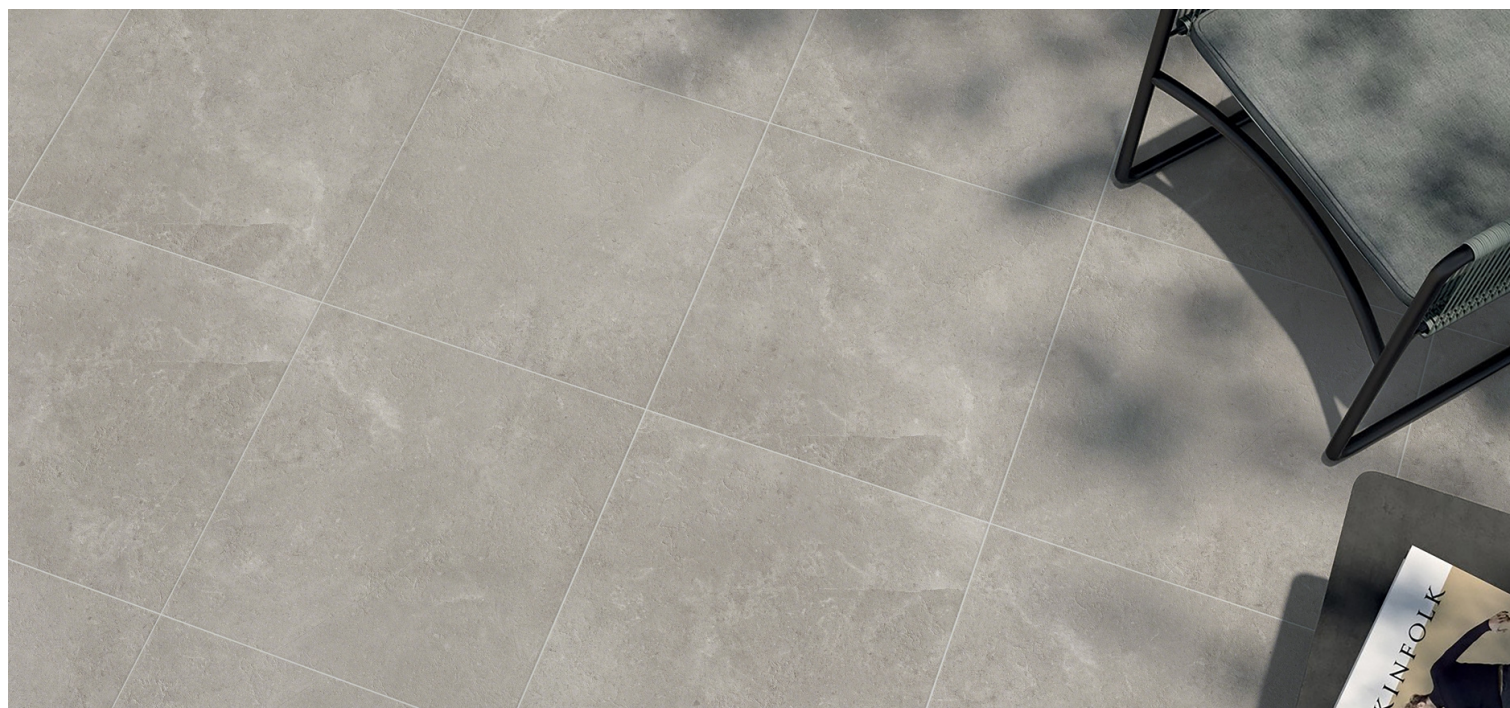

Packing Information

Tile Description		Quantity per Box	Quantity per m2		Quantity per Pallet	
Size (mm)	Finish	Pieces	Pieces	Weight	m2	Boxes
73 x 298	Honed	40	44.44	18.00kg	40.50	45
300 x 300	Honed	11	11.11	22.22kg	55.44	56
300 x 600	Honed	8	5.56	22.22kg	57.60	40
600 x 600	Honed In/Out	4	2.78	22.22kg	57.60	40
600 x 1200	Honed	2	1.39	25.69kg	40.32	28



The data and information contained in these specification sheets are indicative only unless stated otherwise. As ColorTile cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.