

Montana



MONTANA

COLOURS, FORMATS & FINISHES



In/Out | P4

	White	Sand	Grigio
600 x 1200mm	●	●	●
600 x 600mm	●	●	●
300 x 600mm	●	●	●
300 x 300mm	●	●	●
75 x 300mm	●	●	●
404 x 356mm Arrowhead	●	●	●

Textured | P5


600 x 600mm 2CM Paver	●	●	●
398 x 600mm Coping Paver	●	●	●




FINISH: **IN/OUT** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: RECTIFIED | V RATING: V2
FINISH: **TEXTURED** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: RECTIFIED | V RATING: V2



Colour variation is an inherent property of all kiln-fired products. Tiles supplied may vary from samples provided. All slip ratings are provided subject to the guidelines outlined in our terms and conditions.




600 x 600mm
54548 (in/out)
54550 (textured 2CM)

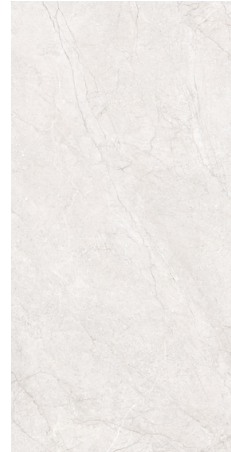


600 x 1200mm
54549 (in/out)




404 x 356mm (sheet size)
54553 (in/out)




75 x 300mm
54552 (in/out)



300 x 300mm
54546 (in/out)



398 x 600mm Copping
54551 (textured 2CM)



300 x 600mm
54547 (in/out)



600 x 600mm
54540 (in/out)
54542 (textured 2CM)



600 x 1200mm
54541 (in/out)




404 x 356mm (sheet size)
54545 (in/out)



75 x 300mm
54544 (in/out)



300 x 300mm
54562 (in/out)



398 x 600mm Copping
54543 (textured 2CM)



300 x 600mm
54563 (in/out)

Grigio



V2

P4 2CM - P5



600 x 600mm
54556 (in/out)
54558 (textured 2CM)




600 x 1200mm
54557 (in/out)




404 x 356mm (sheet size)
54591 (in/out)




75 x 300mm
54590 (in/out)



300 x 300mm
54554 (in/out)



398 x 600mm Coping
54559 (textured 2CM)



300 x 600mm
54555 (in/out)



Technical Specifications

Properties	Test Method	Required Value	Value	Applies to
 Water absorption	EN ISO 10545-3	$\leq 0.5\%$	$\leq 0.5\%$	Full range
 Determination of dimensions	EN ISO 10545-2	Length and width $\pm 0.6\%$ Thickness $\pm 5.00\%$ Transmutation $\pm 0.5\%$	Length and width $\pm 0.1\%$ Thickness $\pm 3\%$ Transmutation $\pm 0.2\%$	Full range
 Breaking strength	EN ISO 10545-4	≥ 1300 N	≥ 1300 N	Full range
 Modulus of Rupture	EN ISO 10545-4	≥ 35 N/mm ²	≥ 35 N/mm ²	Full range
 Abrasion resistance	EN ISO 10545-7	≤ 205 mm ²	≤ 160 mm ²	Full range
 Slip resistance (wet pendulum test)	AS 4586-2013/ AMDT1-2017	N/A	P5 P4	Textured In/Out
 Chemical resistance	EN ISO 10545-13	Min. GB	Pass	Full range
 Stain resistance	ISO 10545-14	Min class 3	Pass	Full range
 Origin	N/A	N/A	China	Full range
 Shade variation	N/A	N/A	V2	Full range



Packing Information

Tile Description		Quantity per Box	Quantity per m2		Quantity per Pallet	
Size (mm)	Finish	Pieces	Pieces	Weight	m2	Boxes
Arrowhead Mosaic	In/Out	N/A	N/A	N/A	N/A	N/A
75 x 300	In/Out	36	44.44	22.22kg	58.32	72
300 x 300	In/Out	11	11.11	22.00kg	55.44	56
300 x 600	In/Out	8	5.56	21.18kg	57.60	40
398 x 600 Coping Paver	Textured	2	4.19	46.88kg	N/A	64
600 x 600	In/Out	4	2.78	21.18kg	57.60	40
600 x 600 2CM Paver	Textured	2	2.78	46.53kg	28.80	40
600 x 1200	In/Out	2	1.39	23.61kg	57.60	40



The data and information contained in these specification sheets are indicative only unless stated otherwise. As ColorTile cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.