

Notion

The Notion Range is a basalt stone inspired glazed porcelain tile available in an in/out finish. The range is available in three colours - Carbon, Mica and Mist. Notion is suitable for wet and main living areas and is also rated for commercial use.


Carbon



300 x 300mm
52889 (in/out) P4




300 x 600mm
52890 (in/out) P4



600 x 600mm
52891 (in/out) P4

Mica

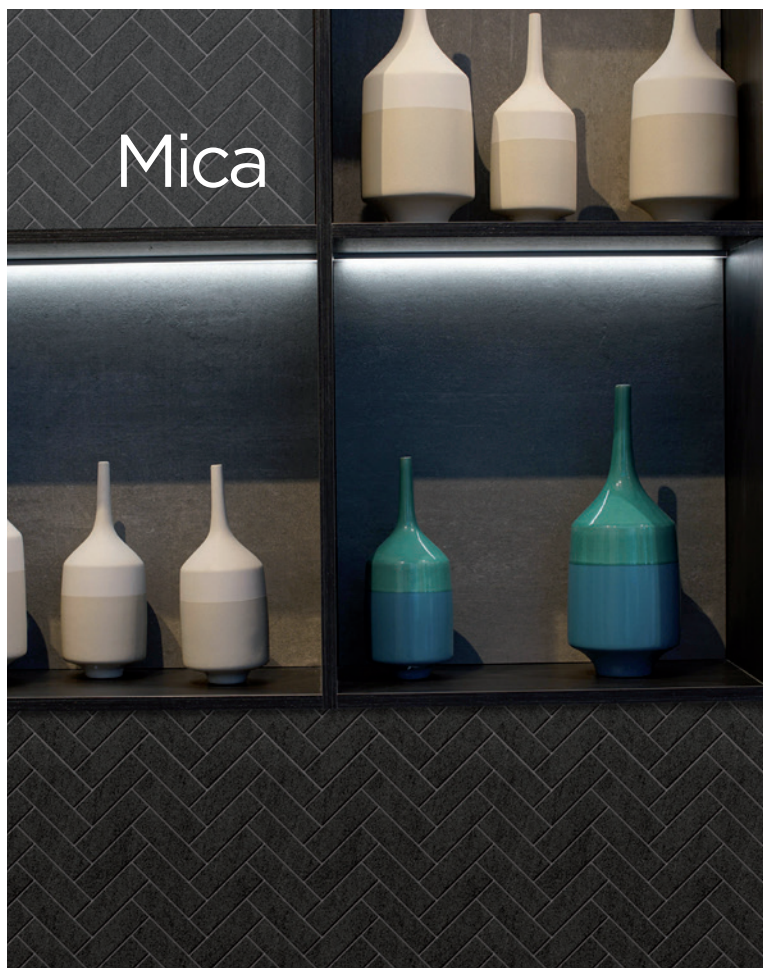

300 x 300mm
52895 (in/out) P4



300 x 600mm
52896 (in/out) P4



600 x 600mm
52897 (in/out) P4

Mist



300 x 300mm
52898 (in/out) P4












300 x 600mm
52899 (in/out) P4



600 x 600mm
52900 (in/out) P4

Technical Specification

| | Properties | Test Method | Required Value | Value | Applies to |
|--|--|--------------|----------------|---------------|------------|
|  | Water absorption | ASTM C373 | $\leq 0.5\%$ | $\leq 0.11\%$ | Full range |
|  | Breaking strength | ASTM C648 | ≥ 1100 N | ≥ 2143 N | Full range |
|  | Abrasion resistance | ASTM C1027 | As reported | Class 3 | Full range |
|  | Slip resistance (oil wet ramp test) | AS 4586:2013 | N/A | R10 | Full range |
|  | Slip resistance (wet pendulum test) | AS 4586:2013 | N/A | P4 | Full range |
|  | Chemical resistance | ASTM C650 | As reported | Class A | Full range |
|  | Stain resistance | ASTM C1378 | As reported | Class A | Full range |
|  | Origin | N/A | N/A | China | Full range |
|  | Shade variation | N/A | N/A | V2 | Full range |

Packing Information

| Tile description | | Quantity per box | Quantity per m2 | | Quantity per pallet | |
|------------------|---------|------------------|-----------------|----------|---------------------|-------|
| Size (mm) | Texture | Pieces | Pieces | Weight | m2 | boxes |
| 300 x 300 | In/out | 11 | 11.11 | 22.22 kg | 55.44 | 56 |
| 300 x 600 | In/out | 8 | 5.56 | 22.60 kg | 57.60 | 40 |
| 600 x 600 | In/out | 4 | 2.78 | 22.22 kg | 57.60 | 40 |



The data and information contained in these specification sheets are indicative only unless stated otherwise.
As ColorTile cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation.
The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose.
To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet.
No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.