

Bristol

The Bristol range offers a minimalistic look. Available in 300 x 300mm and 450 x 450mm formats, this glazed tile is available in four colourways: beige, cement, cream and grey. Bristol is suitable for internal walls and floors, including wet areas.



BRISTOL

COLOURS, FORMATS & FINISHES



Matt | P2


	Cream	Grey	Cement
450 x 450mm	●	●	●
300 x 300mm	●	●	●

Textured | P5

450 x 450mm	●	●	●
-------------	---	---	---


FINISH: **MATT** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: UNRECTIFIED | V RATING: V1
FINISH: **TEXTURED** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: UNRECTIFIED | V RATING: V1



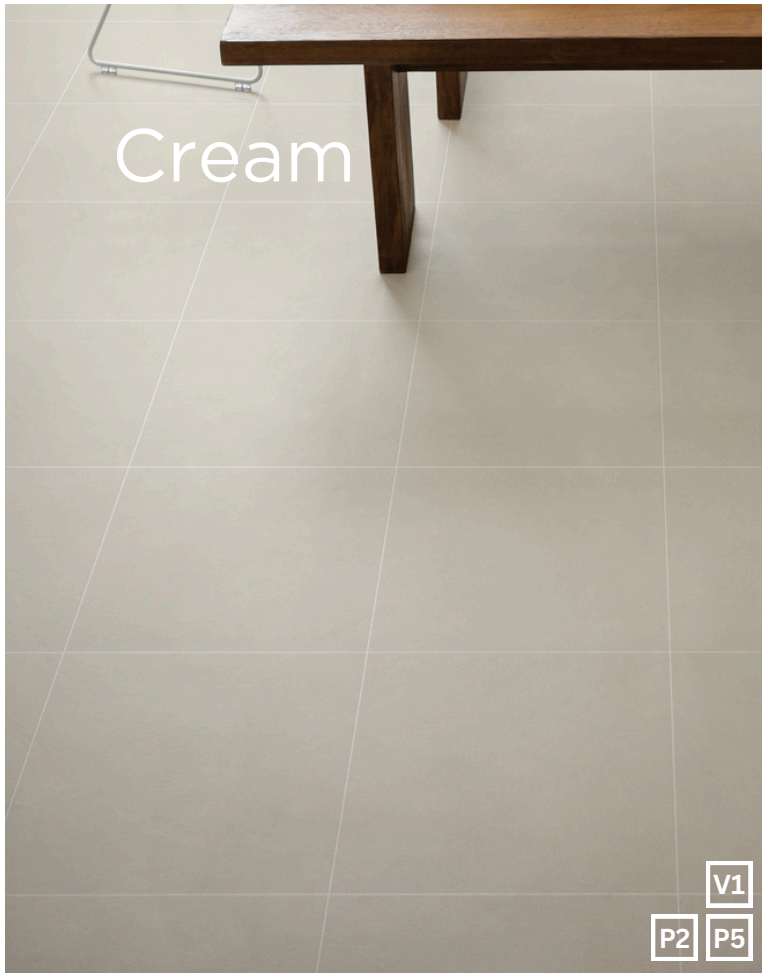


Cream

V1
P2 P5



300 x 300mm
53824 (matt)



450 x 450mm
53819 (matt)
53828 (textured)



Grey

V1
P2 P5




300 x 300mm
53825 (matt)



450 x 450mm
53820 (matt)
53829 (textured)

Cement

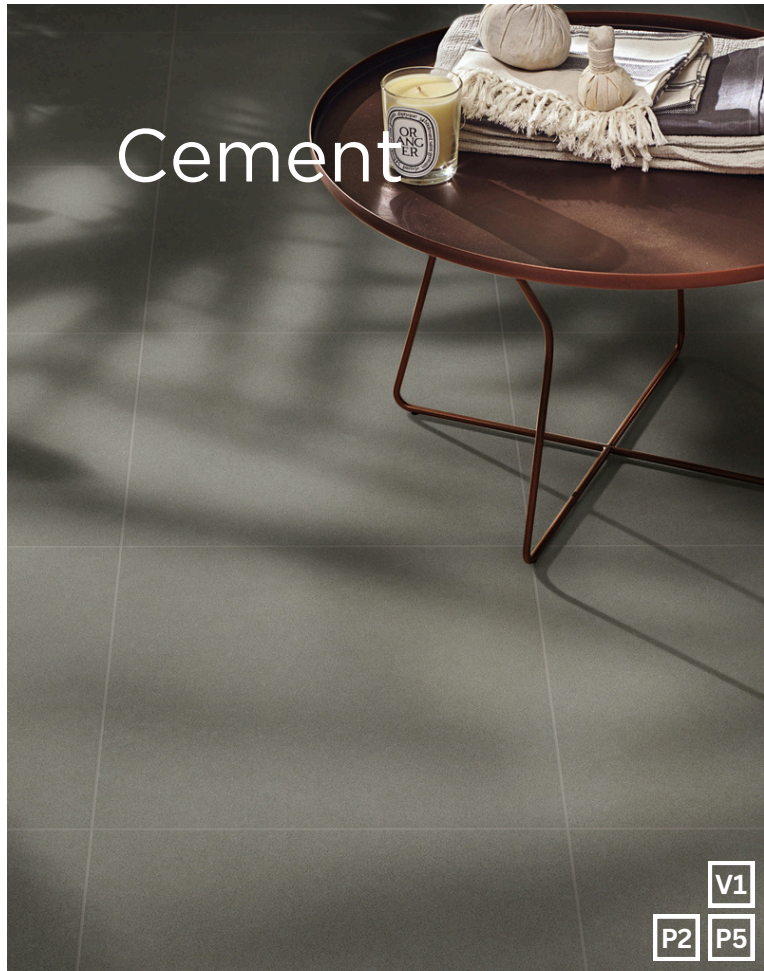

V1
P2 P5












300 x 300mm
53823 (matt)



450 x 450mm
53821 (matt)
53827 (textured)



Technical Specifications

Properties	Test Method	Required Value	Value	Applies to
 Water absorption	ISO 10545-3	$\leq 0.5\%$	0.09%	Full range
 Determination of dimensions	ISO 10545-2	Length and width $\pm 0.5\%$ Thickness $\pm 5.00\%$	Length 0.02% Width 0.11% Thickness 1.4%	Full range
 Breaking strength	ISO 10545-4 ISO 10545-4	≥ 1300 N Minimum 35 MPa	1940 N 44.4 MPa	Full range
 Abrasion resistance	ISO 10545-6	Class 3 min	Class 3	Full range
 Slip resistance (wet pendulum test)	AS 4586-2013/ AMDT1-2017	N/A	P2 - Matt P5 - Textured	Full range
 Chemical resistance	ISO 10545-13	GB min.	A, LA, HA	Full range
 Stain resistance	ISO 10545-14	Class 3 min.	Class 5	Full range
 Origin	N/A	N/A	China	Full range
 Shade variation	N/A	N/A	V1	Full range



Packing Information

Tile Description		Quantity per Box	Quantity per m2		Quantity per Pallet	
Size (mm)	Finish	Pieces	Pieces	Weight	m2	Boxes
300 x 300	Matt	12	11.11	18.90kg	56.16	78
450 x 450	Matt Textured	5	4.94	17.38kg	72.90	72



The data and information contained in these specification sheets are indicative only unless stated otherwise. As ColorTile cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.