

Norcia

The Norcia is perfect for giving any space a stylish, updated look. Whether for residential or commercial use, this collection offers both an indoor and outdoor finish. Available in five formats, 75 x 300mm, 300 x 600mm, 600 x 600mm, 600 x 1200mm and a square mosaic Norcia is sure to add a hint of modernity to living spaces. The range is easy to install for quick improvements to entryways or patios. Embrace the sleek design of the Norcia and experience the reinvigorating effects of a newly refreshed space today.



Beige



75 x 300mm
53751 (in/out) P4



300 x 300mm mosaic
53748 (in/out) P4



300 x 600mm
53705 (in/out) P4



600 x 600mm
53706 (in/out) P4
53709 (textured 2cm thick) P5



398 x 600mm Bullnose
53708 (textured) P5



600 x 1200mm
53707 (in/out) P5



Silver



75 x 300mm
53749 (in/out) P4



300 x 300mm mosaic
53746 (in/out) P4




300 x 600mm
53710 (in/out) P4



600 x 600mm
53711 (in/out) P4
53714 (textured 2cm thick) P5



398 x 600mm Bullnose
53713 (textured) P5

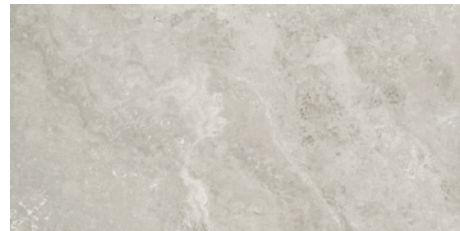

600 x 1200mm
53712 (in/out) P4

Light




75 x 300mm
53750 (in/out) P4



300 x 300mm mosaic
53747 (in/out) P4




300 x 600mm
53700 (in/out) P4



600 x 600mm
53701 (in/out) P4
53704 (textured 2cm thick) P5



398 x 600mm Bullnose
53703 (textured) P5

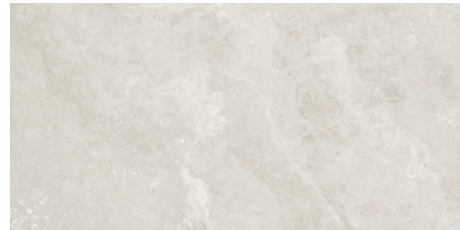

600 x 1200mm
53702 (in/out) P4



Technical Specification

Properties	Test Method	Required Value	Value	Applies to
 Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.5%	Full range
 Determination of dimensions	EN ISO 10545-2	Length and width ± 0.6% Thickness ± 5.00% Transmutation ± 0.5%	Length and width ± 0.1% Thickness ± 3% Transmutation ± 0.2%	Full range
 Breaking strength	EN ISO 10545-4	≥ 1300 N	≥ 1300 N	Full range
 Modulus of rupture	EN ISO 10545-4	≥ 35 N/mm ²	≥ 35 N/mm ²	Full range
 Abrasion resistance	EN ISO 10545-7	≤ 205mm ²	≤ 160mm ²	Full range
 Slip resistance (wet pendulum test)	AS 4586-2013/ AMDT1-2017	N/A	P5 P4	Textured In/out
 Chemical resistance	EN ISO 10545-13	Min. GB	Pass	Full range
 Stain resistance	ISO 10545-14	Min class 3	Pass	Full range
 Origin	N/A	N/A	China	Full range
 Shade variation	N/A	N/A	V3	Full range

Packing Information

Tile description		Quantity per box	Quantity per m2		Quantity per pallet	
Size (mm)	Texture	Pieces	Pieces	Weight	m2	boxes
75 x 300	In/out	36	44.44	22.22 kg	60.75	75
300 x 300 Mosaic	In/out	11	11.11	22.22 kg	55.44	56
300 x 600	In/out	8	5.56	21.18 kg	57.60	40
398 x 600 Bullnose	Textured	2	4.19	46.88 kg	30.6	64
600 x 600	In/out	4	2.78	21.18 kg	57.60	40
600 x 600 2cm pavers	Textured	2	2.78	46.53 kg	28.80	40
600 x 1200	In/out	2	1.39	23.61 kg	86.40	60

The data and information contained in these specification sheets are indicative only unless stated otherwise. As ColorTile cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.