


## **Technical Specification**

	Properties	Test Method	Required Value	Value	Applies to
	Water absorption	ISO 10545-3	≤ 0.5%	16%	Full range
Î	Determination of dimensions	ISO 10545-2	Length and width ± 0.5% Thickness ± 5.00% Edge straightness ± 0.5% Surface flatness ± 5%	Length and width ± 0.5% Thickness -2.7% ~ 1.4% Edge straightness 0% Surface flatness ± 0.1%	Full range
	Breaking strength	ISO 10545-4	≥ 200 N	522 N	Full range
	Modulus of rupture	ISO 10545-4	Minimum 15 MPa	19 MPa	Full range
0	Abrasion resistance	ISO 10545-7	CLASS 3 min	Class 3	Full range
	Chemical resistance	ISO 10545-13	GB min.	GLA, GA	Full range
	Stain resistance	ISO 10545-14	Class 3 min.	Class 5	Full range
	Origin	N/A	N/A	China	Full range
	Shade variation	N/A	N/A	V2	Full range



## **Packing Information**

Tile description		Quantity per box	Quantity per m2		Quantity per pallet	
Size (mm)	Texture	Pieces	Pieces	Weight	m2	boxes
58 x 242	Gloss Matt	70	71.25	13.80 kg	82.53	84
120 x 120	Gloss Matt	80	69.44	14.50 kg	96.77	84

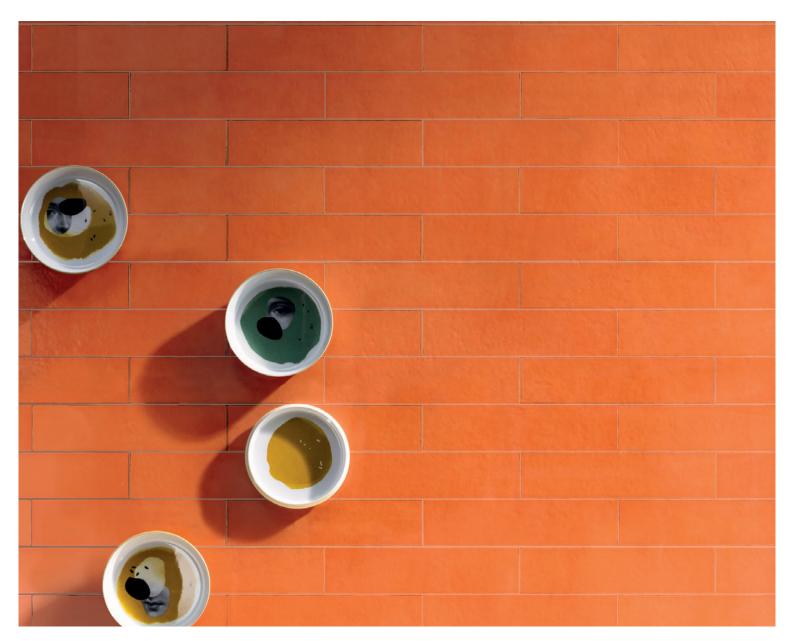

The data and information contained in these specification sheets are indicative only unless stated otherwise.

As ColorTile cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation.

The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose.

To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet.

No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.

