







**600 x 1200mm** 53950 (polished) P2






## **Technical Specification**

	Properties	Test Method	Required Value	Value	Applies to
	Water absorption	EN ISO 10545-3	≤ 0.5%	<0.1%	Full range
	Determination of dimensions	EN ISO 10545-2	Length and width ± 0.6% Thickness ± 5.00% Transmutation ± 0.5%	Compliant	Full range
	Breaking strength	EN ISO 10545-4	≥ 1300 N	Compliant	Full range
	Modulus of rupture	EN ISO 10545-4	35 N/mm²	Compliant	Full range
*E	Slip resistance (oil wet ramp test)	DIN 51130	N/A	R10	Full range
	Chemical resistance	EN ISO 10545-13	Min. GB	Compliant	Full range
	Stain resistance	EN ISO 10545-14	Min class 3	Compliant	Full range
	Origin	N/A	N/A	ltaly	Full range
	Shade variation	N/A	N/A	V3	Full range



## **Packing Information**

Tile description		Quantity per box	Quantity per m2		Quantity per pallet	
Size (mm)	Texture	Pieces	Pieces	Weight	m2	boxes
600 x 1200	Polished	2	1.39	22.00	34.56	24

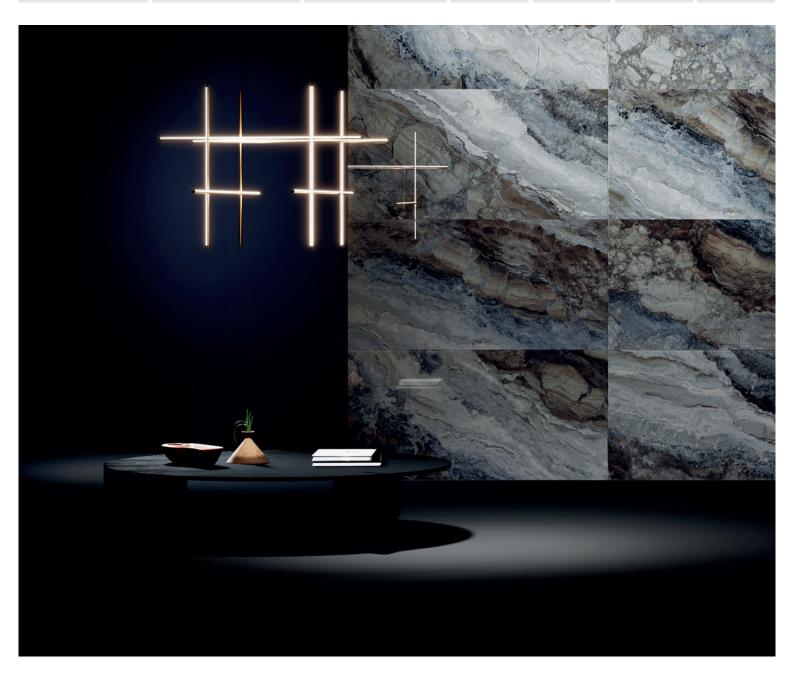

The data and information contained in these specification sheets are indicative only unless stated otherwise. As ColorTile cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty or finerchantability or fitness for a particular purpose.

To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet.

No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.

