

# Venistone

Venistone combines the opulent and intricate elegance of stone with the durability of a porcelain tile. The range is available in five colourways - White, Cream, Light Grey, Dark Grey and Charcoal - and in formats 300 x 300mm, 300 x 600mm, 600 x 600mm as well as the contemporary format 600 x 1200mm. Suitable for internal and external applications, as well as walls, floors and wet areas, Venistone brings a contemporary and rich design element to its space.







# Charcoal




300 x 300mm (48 faces)  
53998 (in/out) P4




300 x 600mm (24 faces)  
53993 (in/out) P4



600 x 600mm (12 faces)  
53988 (in/out) P4

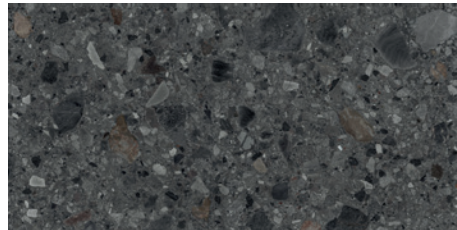

600 x 1200mm (6 faces)  
53983 (in/out) P4

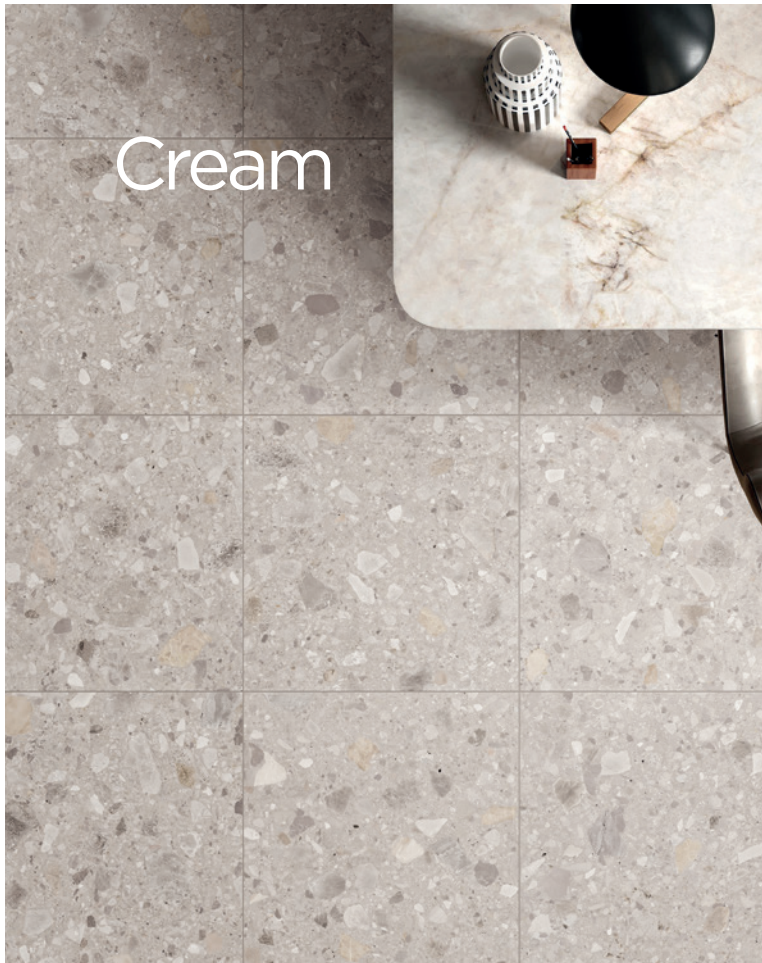

# Cream



300 x 300mm (48 faces)  
53995 (in/out) P4



300 x 600mm (24 faces)  
53990 (in/out) P4



600 x 600mm (12 faces)  
53985 (in/out) P4



600 x 1200mm (6 faces)  
53980 (in/out) P4




## Dark Grey




300 x 300mm (48 faces)  
53997 (in/out) P4



300 x 600mm (24 faces)  
53992 (in/out) P4



600 x 600mm (12 faces)  
53987 (in/out) P4

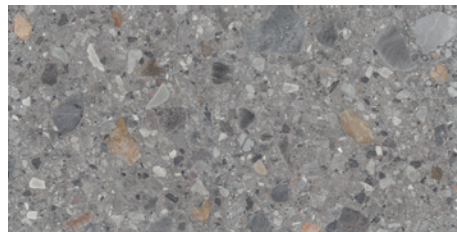

600 x 1200mm (6 faces)  
53982 (in/out) P4




## Light Grey



300 x 300mm (48 faces)  
53996 (in/out) P4



300 x 600mm (24 faces)  
53991 (in/out) P4




600 x 600mm (12 faces)  
53986 (in/out) P4



600 x 1200mm (6 faces)  
53981 (in/out) P4


White



300 x 300mm (48 faces)  
53994 (in/out) P4



300 x 600mm (24 faces)  
53989 (in/out) P4



600 x 600mm (12 faces)  
53984 (in/out) P4



600 x 1200mm (6 faces)  
53979 (in/out) P4



# Technical Specification

Properties	Test Method	Required Value	Value	Applies to
 Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.5%	Full range
 Determination of dimensions	EN ISO 10545-2	Length and width ± 0.6% Thickness ± 5.00% Transmutation ± 0.5%	Length and width ± 0.1% Thickness ± 3% Transmutation ± 0.2%	Full range
 Breaking strength	EN ISO 10545-4	≥ 1300 N	≥ 1300 N	Full range
 Modulus of rupture	EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	≥ 35 N/mm <sup>2</sup>	Full range
 Abrasion resistance	EN ISO 10545-7	≤ 205mm <sup>2</sup>	≤ 160mm <sup>2</sup>	Full range
 Slip resistance (wet pendulum test)	AS 4586:2013	N/A	P4	Full range
 Chemical resistance	EN ISO 10545-13	Min. GB	Pass	Full range
 Stain resistance	ISO 10545-14	Min class 3	Pass	Full range
 Origin	N/A	N/A	China	Full range
 Shade variation	N/A	N/A	V2	Full range

# Packing Information

Tile description		Quantity per box	Quantity per m2		Quantity per pallet	
Size (mm)	Texture	Pieces	Pieces	Weight	m2	boxes
300 x 300	In/Out	11	11.11	22.22	53.46	54
300 x 600	In/Out	8	5.56	21.52	57.60	40
600 x 600	In/Out	4	2.78	21.52	57.60	40
600 x 1200	In/Out	2	1.39	23.26	40.32	28



*The data and information contained in these specification sheets are indicative only unless stated otherwise. As ColorTile cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.*