

# Alpen Stone

Unlock the potential of your space with our Alpen Stone collection, where modern elegance meets unparalleled versatility. Perfect for both residential and commercial settings, this exquisite collection brings an air of sophistication to any environment, whether indoors or outdoors.

Available in six distinct formats – 75 x 300mm, 300 x 300mm, 300 x 600mm, 600 x 600mm, 600 x 1200mm, and 398 x 600mm coping – Alpen Stone is designed to enhance and elevate any area effortlessly. From rejuvenating entryways to revitalising patios, its easy installation ensures a swift and stunning transformation. Embrace the sleek charm of Alpen Stone and breathe new life into your spaces today, creating a haven of modernity and style.



# ALPEN STONE


## COLOURS




Beige



Grey




Smoke



White


## FORMATS




600 x 1200mm  
(12 faces)




600 x 600mm  
(24 faces)



600 x 600mm -  
2CM (24 faces)



398 x 600mm -  
2CM Bullnose  
(24 faces)



300 x 600mm  
(48 faces)



300 x 300mm  
(96 faces)



75 x 300mm  
(192 faces)

FINISH: **IN/OUT** | CATEGORY: PORCELAIN | EDGE DETAIL: RECTIFIED | V RATING: V3  
FINISH: **TEXTURED** | CATEGORY: PORCELAIN | EDGE DETAIL: RECTIFIED | V RATING: V3




Colour variation is an inherent property of all kiln-fired products. Tiles supplied may vary from samples provided. All slip ratings are provided subject to the guidelines outlined in our terms and conditions.







# Beige




600 x 600mm  
54186 (in/out) P4  
54188 (Textured 2cm thick) P5



398 x 600mm Coping  
54189 (Textured) P5



300 x 600mm  
54185 (in/out) P4



300 x 300mm  
54184 (in/out) P4




600 x 1200mm  
54187 (in/out) P4



75 x 300mm  
54220 (in/out) P4



# Grey




600 x 600mm  
54198 (in/out) P4  
54200 (Textured 2cm thick) P5



398 x 600mm Coping  
54201 (Textured) P5



300 x 600mm  
54197 (in/out) P4



300 x 300mm  
54196 (in/out) P4



600 x 1200mm  
54199 (in/out) P4




75 x 300mm  
54221 (in/out) P4







# Smoke




600 x 600mm  
54204 (in/out) P4  
54206 (Textured 2cm thick) P5




398 x 600mm Copping  
54207 (Textured) P5



300 x 600mm  
54203 (in/out) P4



300 x 300mm  
54202 (in/out) P4

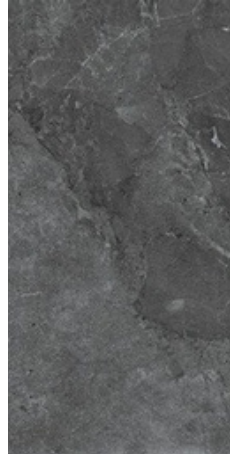


600 x 1200mm  
54205 (in/out) P4




75 x 300mm  
54222 (in/out) P4




# White




600 x 600mm  
54192 (in/out) P4  
54194 (Textured 2cm thick)




398 x 600mm Copping  
54195 (Textured) P5



300 x 600mm  
54191 (in/out) P4



300 x 300mm  
54190 (in/out) P4

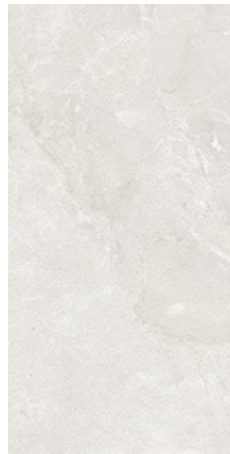







600 x 1200mm  
54193 (in/out) P4



75 x 300mm  
54223 (in/out) P4

# Technical Specification

	Properties	Test Method	Required Value	Value	Applies to
	Water absorption	EN ISO 10545-3	$\leq 0.5\%$	$\leq 0.5\%$	Full range
	Determination of dimensions	EN ISO 10545-2	Length and width $\pm 0.6\%$ Thickness $\pm 5.00\%$ Transmutation $\pm 0.5\%$	Length and width $\pm 0.1\%$ Thickness $\pm 3\%$ Transmutation $\pm 0.2\%$	Full range
	Breaking strength	EN ISO 10545-4	$\geq 1300$ N	$\geq 1300$ N	Full range
	Modulus of rupture	EN ISO 10545-4	$\geq 35$ N/mm <sup>2</sup>	$\geq 35$ N/mm <sup>2</sup>	Full range
	Abrasion resistance	EN ISO 10545-7	$\leq 205$ mm <sup>2</sup>	$\leq 160$ mm <sup>2</sup>	Full range
	Slip resistance (wet pendulum test)	AS 4586-2013/ AMDT1-2017	N/A	P5 P4	Textured In/out
	Chemical resistance	EN ISO 10545-13	Min. GB	Pass	Full range
	Stain resistance	ISO 10545-14	Min class 3	Pass	Full range
	Origin	N/A	N/A	China	Full range
	Shade variation	N/A	N/A	V3	Full range

# Packing Information

Tile description		Quantity per box	Quantity per m2		Quantity per pallet	
Size (mm)	Texture	Pieces	Pieces	Weight	m2	boxes
75 x 300	In/out	36	44.44	22.22kg	58.32	72
300 x 300	In/out	11	11.11	22.00 kg	55.44	56
300 x 600	In/out	8	5.56	21.18 kg	57.60	40
398 x 600 Coping	In/out	2	4.19	46.88 kg	N/A	64
600 x 600	In/out	4	2.78	21.18 kg	57.60	40
600 x 600 2cm pavers	In/out	2	2.78	46.53 kg	28.80	40
600 x 1200	In/out	2	1.39	23.61 kg	57.60	40

The data and information contained in these specification sheets are indicative only unless stated otherwise. As ColorTile cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.