Venistone

Venistone combines the opulent and intricate elegance of stone with the durability of a porcelain tile. The range is available in five colourways – White, Cream, Light Grey, Dark Grey and Charcoal – and in formats 300 x 300mm, 300 x 600mm, 600 x 600mm as well as the contemporary format 600 x 1200mm. Suitable for internal and external applications, as well as walls, floors and wet areas, Venistone brings a contemporary and rich design element to its space.

VENISTONE

COLOURS

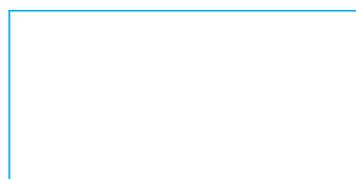|				
Charcoal	Cream	Dark Grey	Light Grey	White

FORMATS

600 x 1200mm
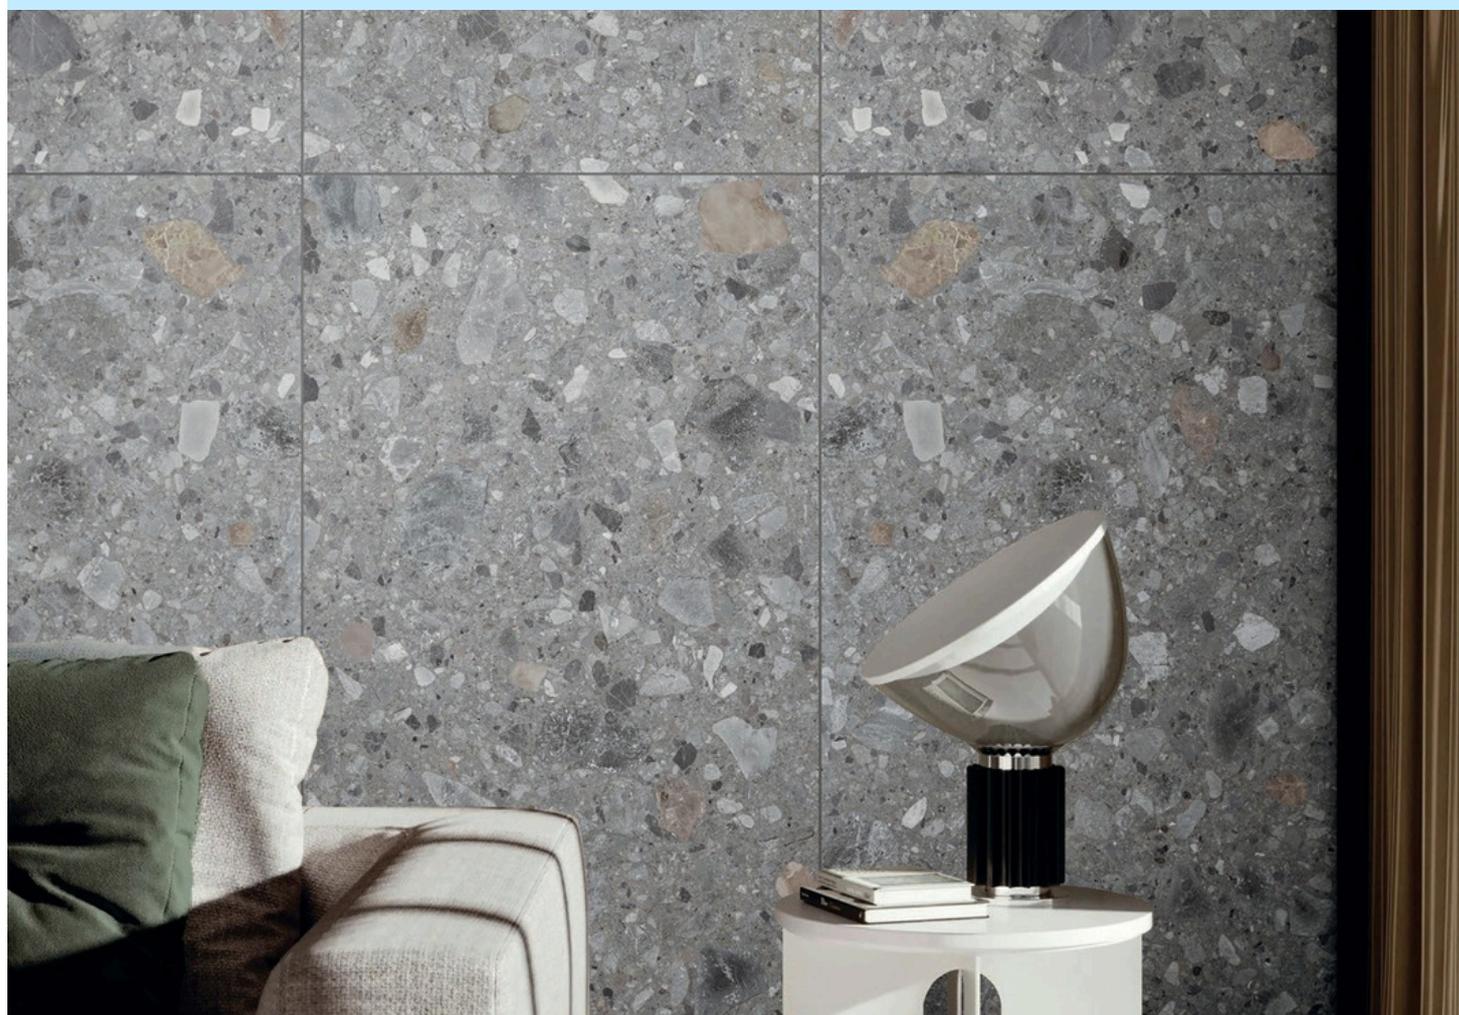(12 faces)

600 x 600mm
(24 faces)
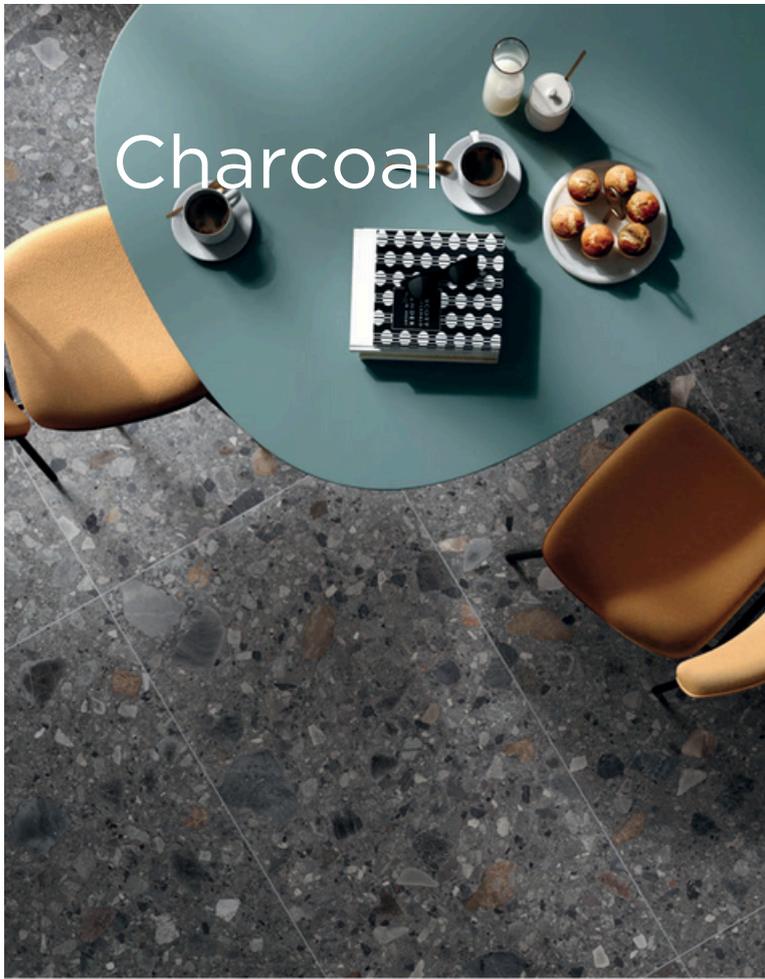
600 x 600mm -
2CM (24 faces)

300 x 600mm
(48 faces)

FINISH: **IN**/**OUT** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: RECTIFIED | V RATING: V3
FINISH: **TEXTURED** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: RECTIFIED | V RATING: V3

Charcoal

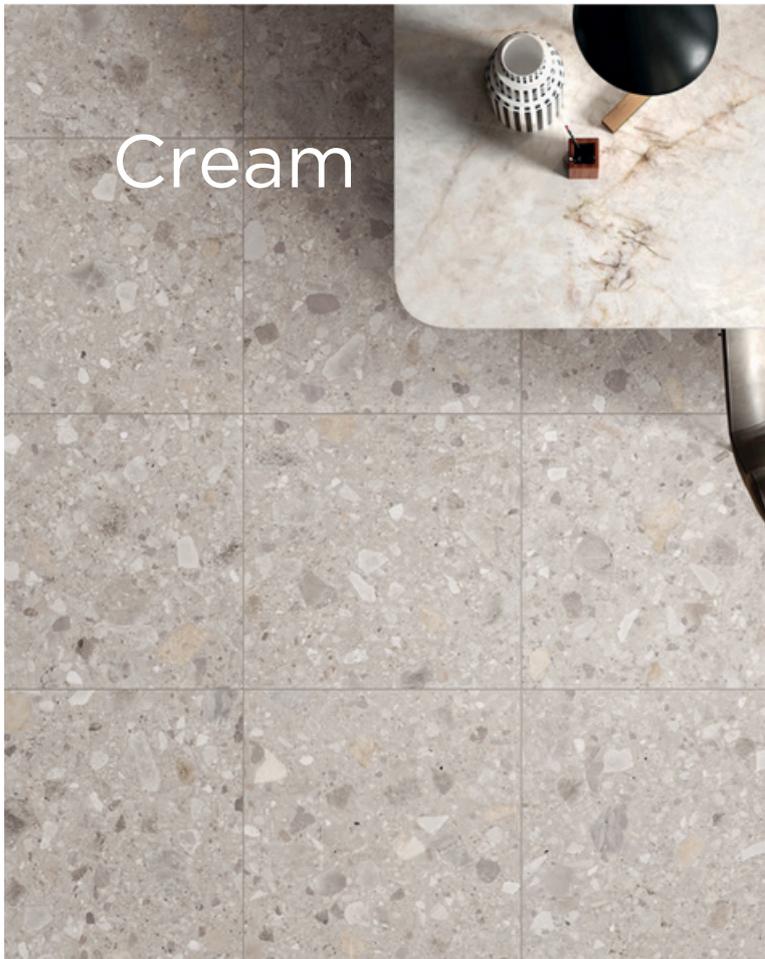300 x 600mm (24 faces)
53993 (in/out) P4

300 x 300mm (48 faces)
53998 (in/out) P4

600 x 600mm (12 faces)
53988 (in/out) P4
54401 (texture 2cm thick) P5

600 x 1200mm (6 faces)
53983 (in/out) P4

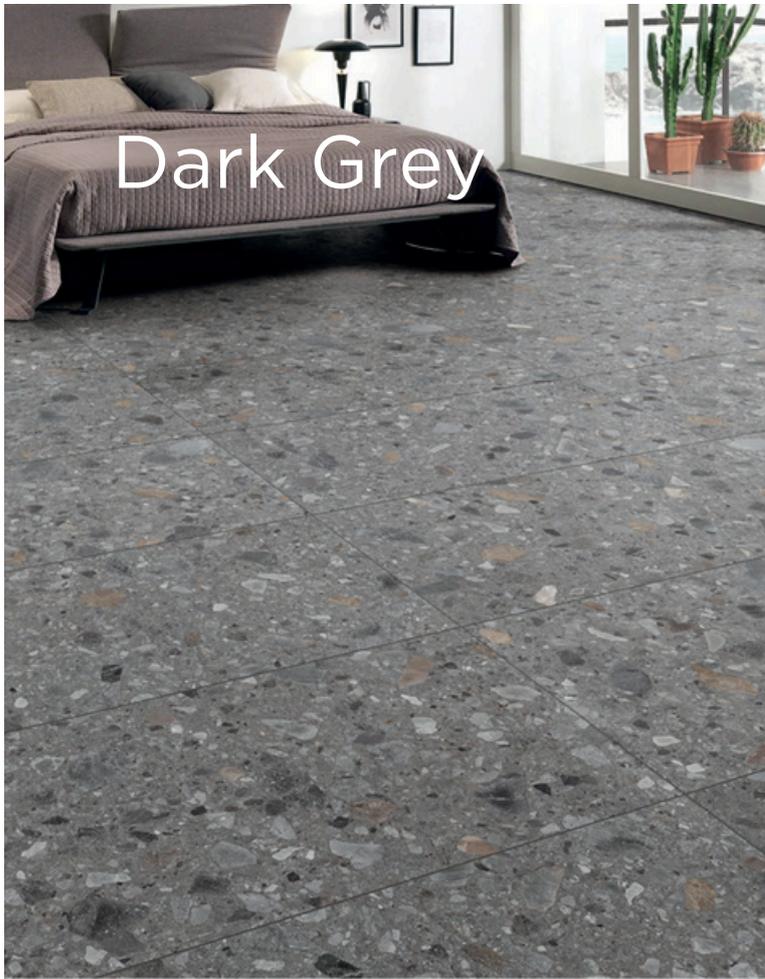# Cream

300 x 600mm (24 faces)
53990 (in/out) P4

300 x 300mm (48 faces)
53995 (in/out) P4

600 x 600mm (12 faces)
53985 (in/out) P4
54402 (textured 2cm thick) P5

600 x 1200mm (6 faces)
53980 (in/out) P4

ColorTile™

Dark Grey

300 x 600mm (24 faces)
53992 (in/out) P4

300 x 300mm (48 faces)
53997 (in/out) P4

600 x 600mm (12 faces)
53987 (in/out) P4
54404 (textured 2cm thick) P5

600 x 1200mm (6 faces)
53982 (in/out) P4

Light Grey

300 x 600mm (24 faces)
53991 (in/out) P4

300 x 300mm (48 faces)
53996 (in/out) P4

600 x 600mm (12 faces)
53986 (in/out) P4
54403 (textured 2cm thick) P5

600 x 1200mm (6 faces)
53981 (in/out) P4

ColorTile™

White

300 x 600mm (24 faces)
53989 (in/out) P4

300 x 300mm (48 faces)
53994 (in/out) P4

600 x 600mm (12 faces)
53984 (in/out) P4
54405 (textured 2cm thick) P5

600 x 1200mm (6 faces)
53979 (in/out) P4

ColorTile™

Technical Specification

	Properties	Test Method	Required Value	Value	Applies to
	Water absorption	EN ISO 10545-3	⩽ 0.5%	⩽ 0.5%	Full range
	Determination of dimensions	EN ISO 10545-2	Length and width ± 0.6% Thickness ± 5.00% Transmutation ± 0.5%	Length and width ± 0.1% Thickness ± 3% Transmutation ± 0.2%	Full range
	Breaking strength	EN ISO 10545-4	≥ 1300 N	≥ 1300 N	Full range
	Modulus of rupture	EN ISO 10545-4	⩾ 35 N/mm2	⩾ 35 N/mm2	Full range
	Abrasion resistance	EN ISO 10545-7	⩽ 205mm2	⩽ 160mm2	Full range
	Slip resistance (wet pendulum test)	AS 4586:2013	N/A	P4	Full range
	Chemical resistance	EN ISO 10545-13	Min. GB	Pass	Full range
	Stain resistance	ISO 10545-14	Min class 3	Pass	Full range
	Origin	N/A	N/A	China	Full range
	Shade variation	N/A	N/A	V2	Full range

Packing Information

Tile description		Quantityper box	Quantity per m2		Quantity per pallet	
Size (mm)	Texture	Pieces	Pieces	Weight	m2	boxes
300 x 300	In/Out	11	11.11	22.22	53.46	54
300 x 600	In/Out	8	5.56	21.52	57.60	40
600 x 600	In/Out	4	2.78	21.52	57.60	40
600 x 1200	In/Out	2	1.39	23.26	40.32	28