

Urban Wall

The Urban range is a modern take on the subway tiles of yesteryear. Whether laid in a traditional or individualized fashion, Urban is perfect for internal feature walls or splashbacks. The range is available in 5 colourways Black, Dark Grey, Light Grey, Light Taupe and White in both matt and gloss and one size of 75 x 300mm.

URBAN WALL

COLOURS, FORMATS & FINISHES



GLOSS	White	Light Taupe	Light Grey	Black
75 x 300mm	•	•	•	•

MATT	White	Light Taupe	Light Grey	Black
75 x 300mm	•	•	•	•

FINISH: **GLOSS** | CATEGORY: CERAMIC WALL TILES | EDGE DETAIL: UNRECTIFIED | V RATING: V1
FINISH: **MATT** | CATEGORY: CERAMIC WALL TILES | EDGE DETAIL: UNRECTIFIED | V RATING: V1



White



75 x 300mm
51743 (gloss wall)
51744 (matt wall)

Light Taupe




75 x 300mm
51749 (gloss wall)
51750 (matt wall)

Light Grey



75 x 300mm
51747 (gloss wall)
51748 (matt wall)

Black

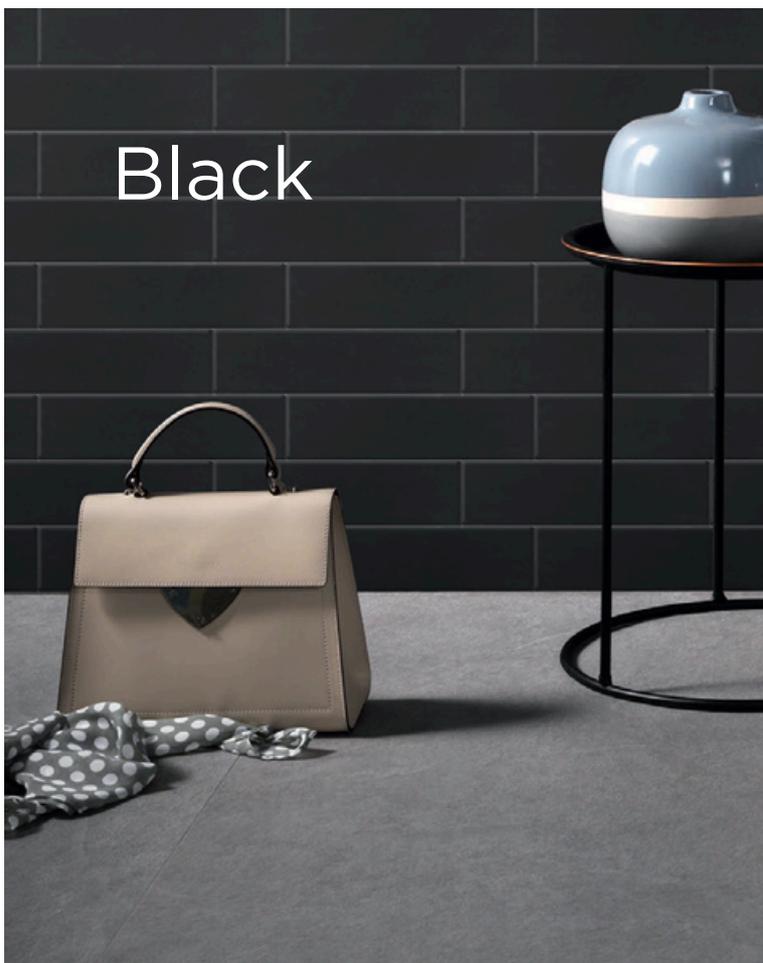


75 x 300mm
51751 (gloss wall)
51752 (matt wall)

Technical Specification

	Properties	TestMethod	Required Value	Value	Applies to
	Water absorption	ISO 10545-3	> 10%	16%	Full range
	Determination of dimensions	ISO 10545-2	Length and width $\pm .50\%$ Thickness $\pm 10.00\%$ Edge straightness $\pm 0.3\%$ Surface flatness $\pm 0.5\%$	Length and width $\pm .02\%$ Thickness $\pm 10.00\%$ Edge straightness $\pm 0.3\%$ Surface flatness $\pm 0.5\%$	Full range
	Breaking strength	ISO 10545-4	≥ 200 N	522 N	Full range
	Modulus of rupture	ISO 10545-4	≥ 15 Mpa	19 Mpa	Full range
	Abrasion resistance	ISO 10545-6	As reported	Class 3 @ 750 revolutions	Full range
	Chemical resistance	ISO 10545-13	Minimum GB	GLA, GA	Full range
	Stain resistance	ISO 10545-14	Minimum class 3	Class 5	Full range
	Origin	N/A	N/A	China	Full range
	Shade variation	N/A	N/A	V1	Full range

Packing Information

Tile description		Quantity per box	Quantity per m2		Quantity per pallet	
Size (mm)	Texture	Pieces	Pieces	Weight	m2	boxes
75 x 300	Gloss Matt	50	44.44	14.50 kg	90.00	80

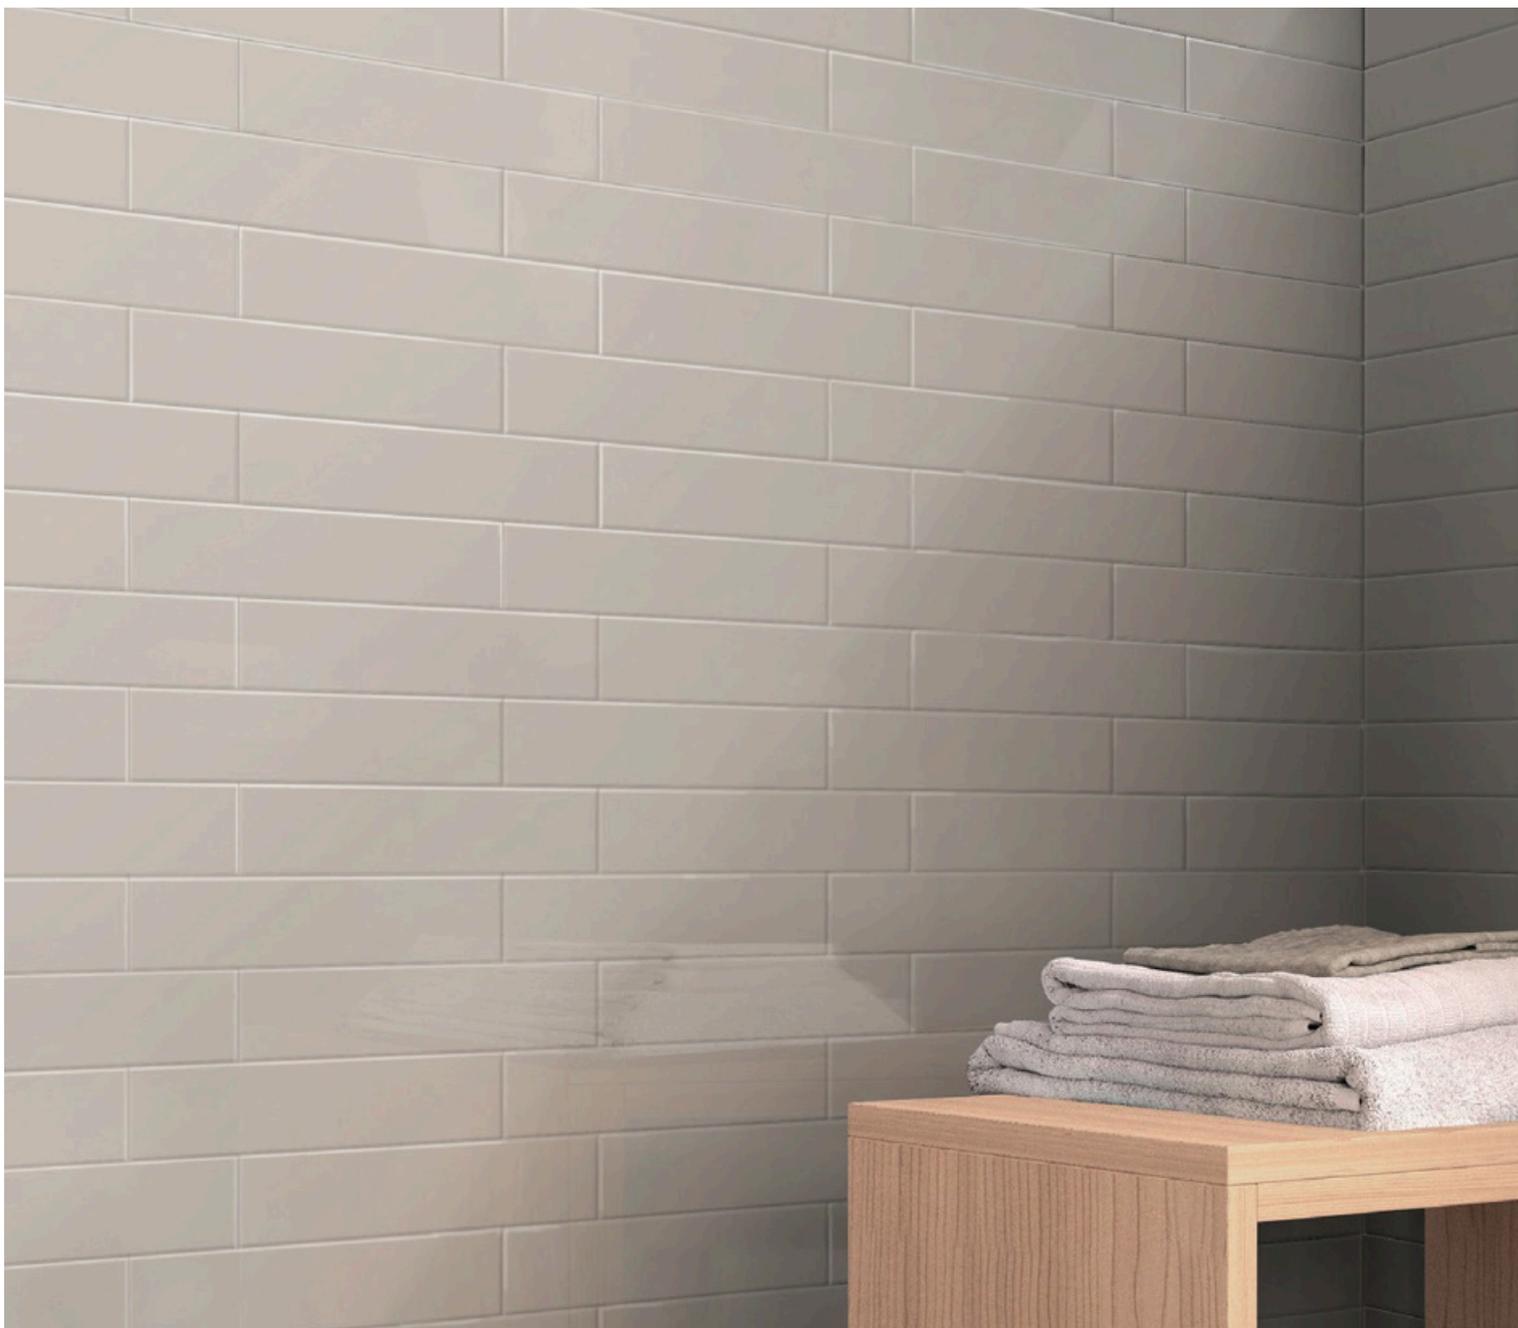

The data and information contained in these specification sheets are indicative only unless stated otherwise. As ColorTile cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.