

Avoca

Unlock the potential of your space with our Avoca collection, where modern elegance meets unparalleled versatility. Perfect for both residential and commercial settings, this exquisite collection brings an air of sophistication to any environment, whether indoors or outdoors. Available in six distinct formats – 75 x 300mm, 300 x 300mm, 300 x 600mm, 600 x 600mm, 600 x 1200mm, and 398 x 600mm coping – Avoca is designed to enhance and elevate any area effortlessly. From rejuvenating entryways to revitalising patios, its easy installation ensures a swift and stunning transformation. Embrace the sleek charm of Avoca and breathe new life into your spaces today, creating a haven of modernity and style.

Avoca

COLOURS, FORMATS & FINISHES



In/Out P4	White	Beige	Grey	Smoke
600 x 1200mm	●	●	●	●
600 x 600mm	●	●	●	●
300 x 600mm	●	●	●	●
300 x 300mm	●	●	●	●
75 x 300mm	●	●	●	●

Lappato	White	Beige	Grey	Smoke
600 x 1200mm	●	●	●	
600 x 600mm	●	●	●	
300 x 600mm	●	●	●	

Textured P5	White	Beige	Grey	Smoke
600 x 600mm 20mm Paver	●	●	●	●
398 x 600mm Coping Paver	●	●	●	●

FINISH: **IN/OUT** | CATEGORY: PORCELAIN | EDGE DETAIL: RECTIFIED | V RATING: V3
 FINISH: **TEXTURED** | CATEGORY: PORCELAIN | EDGE DETAIL: RECTIFIED | V RATING: V3
 FINISH: **LAPPATO** | CATEGORY: PORCELAIN | EDGE DETAIL: RECTIFIED | V RATING: V3




Colour variation is an inherent property of all kiln-fired products. Tiles supplied may vary from samples provided. All slip ratings are provided subject to the guidelines outlined in our terms and conditions.



White




600 x 600mm
54192 (in/out)
54194 (textured 2CM)
54529 (lappato)



75 x 300mm
54223 (in/out)



300 x 300mm
54190 (in/out)



398 x 600mm Coping
54195 (textured)




300 x 600mm
54191 (in/out)
54528 (lappato)



600 x 1200mm
54193 (in/out)
54530 (lappato)



Beige




600 x 600mm
54186 (in/out)
54526 (lappato)
54188 (textured 2CM)




75 x 300mm
54220 (in/out)




300 x 300mm
54184 (in/out)



398 x 600mm Coping
54189 (textured)



300 x 600mm
54185 (in/out)
54525 (lappato)

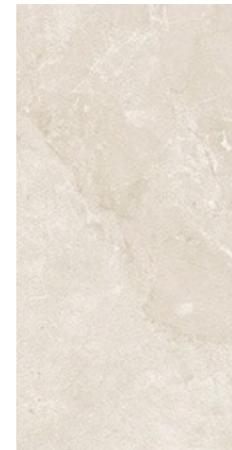

600 x 1200mm
54187 (in/out)
54527 (lappato)



Grey



600 x 600mm
54198 (in/out)
54200 (textured 2CM)
54525 (lappato)



75 x 300mm
54221 (in/out)



300 x 300mm
54196 (in/out)



398 x 600mm Coping
54201 (textured)




300 x 600mm
54197 (in/out)
54531 (lappato)



600 x 1200mm
54199 (in/out)
54533 (lappato)




Smoke



600 x 600mm
54204 (in/out)
54206 (textured 2CM)



75 x 300mm
54222 (in/out)




300 x 300mm
54202 (in/out)



398 x 600mm Coping
54207 (textured)



300 x 600mm
54203 (in/out)

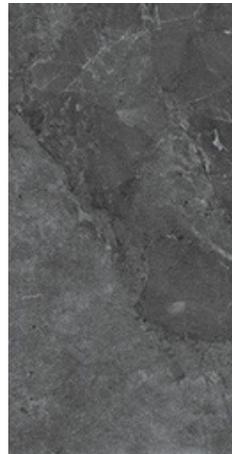

600 x 1200mm
54205 (in/out)

Technical Specification

Properties	Test Method	Required Value	Value	Applies to
 Water absorption	EN ISO 10545-3	$\leq 0.5\%$	$\leq 0.5\%$	Full range
 Determination of dimensions	EN ISO 10545-2	Length and width $\pm 0.6\%$ Thickness $\pm 5.00\%$ Transmutation $\pm 0.5\%$	Length and width $\pm 0.1\%$ Thickness $\pm 3\%$ Transmutation $\pm 0.2\%$	Full range
 Breaking strength	EN ISO 10545-4	≥ 1300 N	≥ 1300 N	Full range
 Modulus of rupture	EN ISO 10545-4	≥ 35 N/mm ²	≥ 35 N/mm ²	Full range
 Abrasion resistance	EN ISO 10545-7	≤ 205 mm ²	≤ 160 mm ²	Full range
 Slip resistance (wet pendulum test)	AS 4586-2013/ AMDT1-2017	N/A	P5 P4	Textured In/out
 Chemical resistance	EN ISO 10545-13	Min. GB	Pass	Full range
 Stain resistance	ISO 10545-14	Min class 3	Pass	Full range
 Origin	N/A	N/A	China	Full range
 Shade variation	N/A	N/A	V3	Full range

Packing Information

Tile description		Quantity per box	Quantity per m2		Quantity per pallet	
Size (mm)	Texture	Pieces	Pieces	Weight	m2	boxes
75 x 300	In/out	36	44.44	22.22kg	58.32	72
300 x 300	In/out	11	11.11	22.00 kg	55.44	56
300 x 600	In/out Lappato	8	5.56	21.18 kg	57.60	40
398 x 600 Coping	In/out	2	4.19	46.88 kg	N/A	64
600 x 600	In/out Lappato	4	2.78	21.18 kg	57.60	40
600 x 600 2cm pavers	In/out	2	2.78	46.53 kg	28.80	40
600 x 1200	In/out Lappato	2	1.39	23.61 kg	57.60	40

The data and information contained in these specification sheets are indicative only unless stated otherwise. As ColorTile cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.