Timeless



ColorTile™

Where style comes to life™

TIMELESS

COLOURS, FORMATS & FINISHES




Satin | P1	White	Gold	Grey
600 x 1200mm	●	●	●
600 x 600mm	●	●	●
300 x 600mm	●	●	●

Polished | P0			
600 x 1200mm	●	●	●
600 x 600mm	●	●	●
300 x 600mm	●	●	●


FINISH: **POLISHED** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: RECTIFIED | V RATING: V2
FINISH: **SATIN** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: RECTIFIED | V RATING: V2





300 x 600mm
54040 (satin)
54041 (polished)

600 x 600mm
54038 (satin)
54039 (polished)

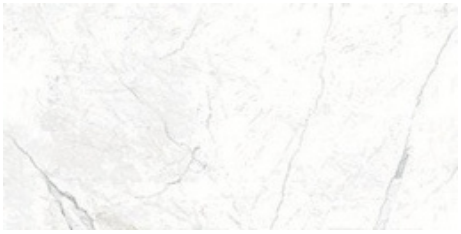

600 x 1200mm
54036 (satin)
54037 (polished)





300 x 600mm
54046 (satin)
54047 (polished)



600 x 600mm
54044 (satin)
54045 (polished)



600 x 1200mm
54042 (satin)
54043 (polished)


ColorTile™

1300 265 678
www.colortile.com.au





300 x 600mm
55201 (satin)
55198 (polished)



600 x 600mm
55202 (satin)
55199 (polished)



600 x 1200mm
55203 (satin)
55200 (polished)



ColorTile™

1300 265 678
www.colortile.com.au

Technical Specifications

Properties	Test Method	Required Value	Value	Applies to
Water absorption	EN ISO 10545-3	⩽ 0.5%	0.5%	Full range
Determination of dimensions	EN ISO 10545-2	Length and width ± 0.3% Thickness ± 5.00% Transmutation ± 0.30%	Length and width ± 0.25% Thickness ± 5.00% Transmutation ± 0.30%	Full range
Breaking strength	EN ISO 10545-4	⩾ 1300 N	1300 N	Full range
Abrasion resistance	EN ISO 10545-4	⩾ 35 N/mm2	⩾ 35 N/mm2	Full range
Slip resistance (oil wet ramp test)	AS 4586:2013	N/A	P1 – Satin	Full range
Chemical resistance	EN ISO 10545-13	Min. GB	GB	Full range
Stain resistance	EN ISO 10545-14	Min class 3	Class 3	Full range
Origin	N/A	N/A	Malaysia	Full range
Shade variation	N/A	N/A	V2	Full range



Technical Specifications - Grey

Properties	Test Method	Required Value	Value	Applies to
Water absorption	EN ISO 10545-3	⩽ 0.5%	0.5%	Full range
Determination of dimensions	EN ISO 10545-2	Length and width ± 0.3% Thickness ± 5.00% Transmutation ± 0.30%	Length and width ± 0.25% Thickness ± 5.00% Transmutation ± 0.30%	Full range
Breaking strength	EN ISO 10545-4	⩾ 1300 N	1300 N	Full range
Abrasion resistance	EN ISO 10545-4	⩾ 35 N/mm2	⩾ 35 N/mm2	Full range
Slip resistance (wet pendulum test)	AS 4586:2013	N/A	P1 – Satin	Satin
Chemical resistance	EN ISO 10545-13	Min. GB	GA	Full range
Stain resistance	EN ISO 10545-14	Min class 3	Class 5	Full range
Origin	N/A	N/A	Malaysia	Full range
Shade variation	N/A	N/A	V2	Full range



Packing Information - White & Gold

Tile Description		Quantity per Box	Quantity per m2		Quantity per Pallet	
Size (mm)	Finish	Pieces	Pieces	Weight	m2	Boxes
300 x 600	Satin Polished	8	5.56	21.40	51.84	36
600 x 600	Satin Polished	4	2.78	21.40	51.84	36
600 x 1200	Satin Polished	2	1.39	23.00	86.40	60



The data and information contained in these specification sheets are indicative only unless stated otherwise. As ColorTile cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.

Packing Information - Grey

Tile Description		Quantity per Box	Quantity per m2		Quantity per Pallet	
Size (mm)	Finish	Pieces	Pieces	Weight	m2	Boxes
300 x 600	Satin Polished	8	5.56	21.40	57.60	40
600 x 600	Satin Polished	4	2.78	21.40	57.60	40
600 x 1200	Satin Polished	2	1.39	23.00	43.20	30



The data and information contained in these specification sheets are indicative only unless stated otherwise. As ColorTile cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.