

Urban Wall



URBAN WALL

COLOURS, FORMATS & FINISHES



GLOSS	White	Light Taupe	Light Grey	Black
75 x 300mm	•	•	•	•

MATT				
75 x 300mm	•	•	•	•

FINISH: **GLOSS** | CATEGORY: CERAMIC WALL TILES | EDGE DETAIL: UNRECTIFIED | V RATING: V1
FINISH: **MATT** | CATEGORY: CERAMIC WALL TILES | EDGE DETAIL: UNRECTIFIED | V RATING: V1



White



V1



75 x 300mm
51743 (gloss wall)
51744 (matt wall)

Light Taupe



V1



75 x 300mm
51749 (gloss wall)
51750 (matt wall)

Light Grey



V1



75 x 300mm
51747 (gloss wall)
51748 (matt wall)

Black



V1




75 x 300mm
51751 (gloss wall)
51752 (matt wall)

Technical Specification

	Properties	TestMethod	Required Value	Value	Applies to
	Water absorption	ISO 10545-3	> 10%	16%	Full range
	Determination of dimensions	ISO 10545-2	Length and width $\pm .50\%$ Thickness $\pm 10.00\%$ Edge straightness $\pm 0.3\%$ Surface flatness $\pm 0.5\%$	Length and width $\pm .02\%$ Thickness $\pm 10.00\%$ Edge straightness $\pm 0.3\%$ Surface flatness $\pm 0.5\%$	Full range
	Breaking strength	ISO 10545-4	≥ 200 N	522 N	Full range
	Modulus of rupture	ISO 10545-4	≥ 15 Mpa	19 Mpa	Full range
	Abrasion resistance	ISO 10545-6	As reported	Class 3 @ 750 revolutions	Full range
	Chemical resistance	ISO 10545-13	Minimum GB	GLA, GA	Full range
	Stain resistance	ISO 10545-14	Minimum class 3	Class 5	Full range
	Origin	N/A	N/A	China	Full range
	Shade variation	N/A	N/A	V1	Full range

Technical Specifications

Properties	Test Method	Required Value	Value	Applies to
 Water absorption	ISO 10545-3	> 10%	16%	Full range
 Determination of dimensions	ISO 10545-2	Length and width $\pm .50\%$ Thickness $\pm 10.00\%$ Edge straightness $\pm 0.3\%$ Surface flatness $\pm 0.5\%$	Length and width $\pm .02\%$ Thickness $\pm 10.00\%$ Edge straightness $\pm 0.3\%$ Surface flatness $\pm 0.5\%$	Full range
 Breaking strength	ISO 10545-4	≥ 200 N	522 N	Full range
 Modulus of rupture	ISO 10545-4	≥ 15 Mpa	19 Mpa	Full range
 Abrasion resistance	ISO 10545-6	As reported	Class 3 @ 750 revolutions	Full range
 Chemical resistance	ISO 10545-13	Minimum GB	GLA, GA	Full range
 Stain resistance	ISO 10545-14	Minimum class 3	Class 5	Full range
 Origin	N/A	N/A	China	Full range
 Shade variation	N/A	N/A	V1	Full range

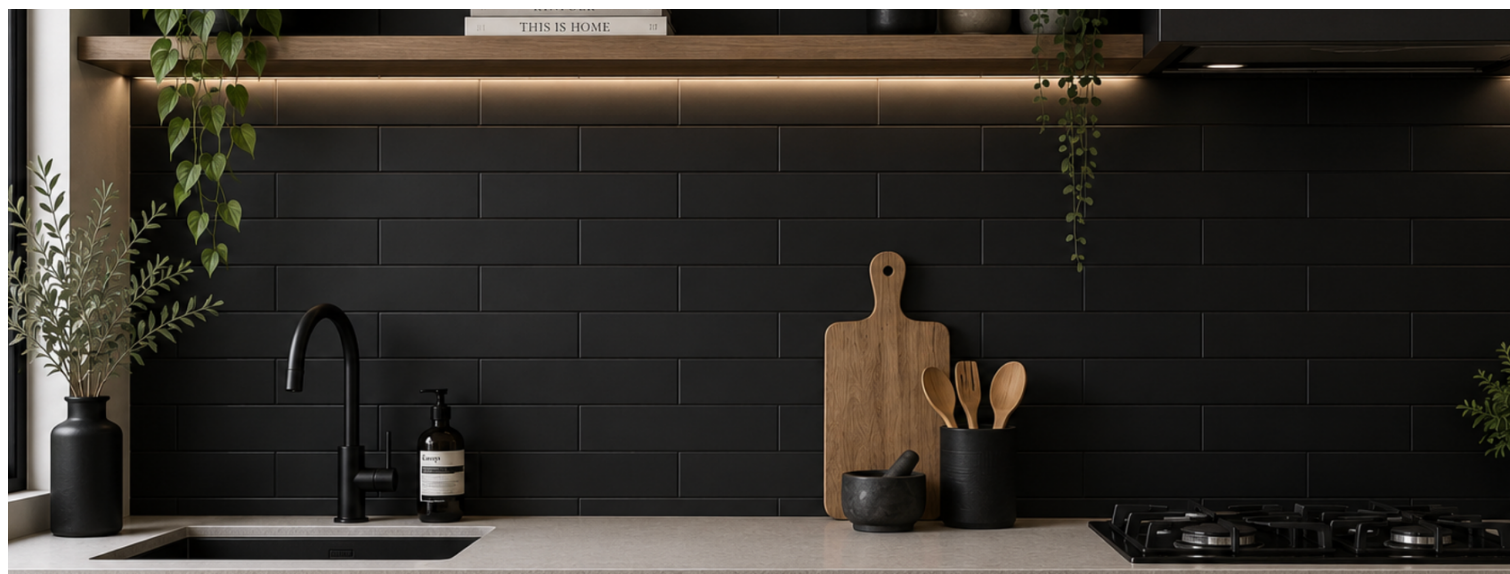

Packing Information

Tile Description		Quantity per Box	Quantity per m2		Quantity per Pallet	
Size (mm)	Finish	Pieces	Pieces	Weight	m2	Boxes
75 x 300	Gloss Matt	50	44.44	14.50kg	90.00	80



The data and information contained in these specification sheets are indicative only unless stated otherwise. As ColorTile cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.