







**296 x 595mm** 52314 (matt) P2



**445** x **900mm** 52316 (matt) P2 52318 (textured) P4



**900 x 900mm** 52326 (matt) P2 52328 (textured) P4





**296 x 595mm** 52313 (matt) P2



**445** x **900mm** 52315 (matt) P2 52317 (textured) P4



**900 x 900mm** 52325 (matt) P2 52327 (textured) P4




## **Technical Specification**

|          | Properties                             | Test Method          | Required Value  | Value                         | Applies to        |
|----------|--|----------------------|-----------------|-------------------------------|-------------------|
|          | Water absorption                       | ISO 10545-3          | ≤ 0.5%          | 0.50%                         | Full range        |
|          | Breaking strength                      | ISO 10545-4          | ≥ 1300 N        | 2833 N                        | Full range        |
|          | Modulus of rupture                     | ISO 10545-4          | ≥ 35 N/mm       | 46 N/mm                       | Full range        |
|          | Abrasion resistance                    | ISO 10545-7          | As reported     | PEI 4                         | Full range        |
|          | Slip resistance<br>(oil wet ramp test) | DIN 51130            | N/A             | R10                           | Natural           |
| <b>K</b> | Slip resistance<br>(wet pendulum test) | Wet pendulum<br>test | N/A             | P4 - Textured<br>P2 - Natural | Natural, Textured |
|          | Chemical resistance                    | ISO 10545-13         | Minimum class B | A, LA, ND                     | Full range        |
|          | Stain resistance                       | ISO 10545-14         | Class 3 min.    | Class 5                       | Full range        |
|          | Origin                                 | N/A                  | N/A             | Italy                         | Full range        |
|          | Shade variation                        | N/A                  | N/A             | V2                            | Full range        |



## **Packing Information**

| Tile description |                  | Quantity per box | Quantity per m2 |          | Quantity per pallet |       |
|------------------|------------------|------------------|-----------------|----------|---------------------|-------|
| Size (mm)        | Texture          | Pieces           | Pieces          | Weight   | m2                  | boxes |
| 295 x 595        | Matt             | 5                | 5.56            | 24.46 kg | 43.20               | 48    |
| 445 x 900        | Gloss            | 3                | 2.50            | 24.14 kg | 38.40               | 32    |
| 900 x 900        | Matt<br>Textured | 2                | 1.23            | 22.68 kg | 32.40               | 20    |

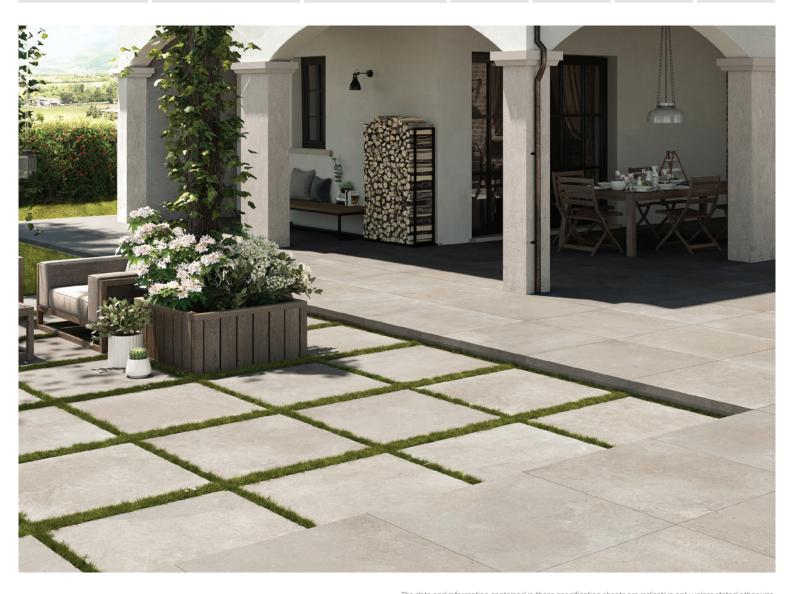

As ColorTile cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose.

To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet.

No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.

