

Riverstone

Replicating the look of stone Riverstone is a rectified glazed porcelain using the latest digital printing technology available today. Available in 2 colourways and 3 different sizes the finishes include matt, semi polished and an external finish with a P4 rating. To complement the range there is also a chevron and rhomboid mosaic.

RIVERSTONE

COLOURS



White

FORMATS



600 x 600mm



600 x 300mm



300 x 300mm



298 x 238mm
actual coverage:
0.0658sqm



264 x 238mm
actual coverage:
0.06sqm

FINISH: **MATT** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: RECTIFIED | V RATING: V2
FINISH: **IN/OUT** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: RECTIFIED | V RATING: V2
FINISH: **SEMI-POLISHED** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: RECTIFIED | V RATING: V2






300 x 300mm
53558 (in/out)P4
51776 (semi polished)



300 x 600mm
53559 (in/out)P4
51775 (semi polished)



600 x 600mm
53560 (in/out)P4
51774 (semi polished)



Rhomboid
264 x 238mm
actual coverage: 0.06sqm
51904 (matt) P2




Chevron
298 x 238mm
actual coverage: 0.0658sqm
51908 (matt) P2

Technical Specification

	Properties	TestMethod	Required Value	Value	Applies to
	Water absorption	ISO 10545-3	$\leq 0.5\%$	0.20%	Full range
	Determination of dimensions	ISO 10545-2	Length and width $\pm 0.5\%$ Thickness $\pm 5.00\%$ Edge straightness $\pm 0.5\%$ Surface flatness $\pm 5\%$	Length and width - 0.04% Thickness 2.32% Edge straightness 0.02% Surface flatness 0.02%	Full range
	Breaking strength	ISO 10545-4	≥ 1300 N	2385 N	Full range
	Modulus of rupture	ISO 10545-4	≥ 35 N/mm	46 N/mm	Full range
	Abrasion resistance	ISO 10545-6	≤ 175 mm ³	Class 4 (2100 cycles)	Full range
	Slip resistance (wet pendulum test)	Wet pendulum test	N/A	P2 - Matt P4 - In/out	Matt, In/out
	Chemical resistance	ISO 10545-13	GB min.	UA, ULA, UHA	Full range
	Stain resistance	ISO 10545-14	Class 3 min.	Class 5	Full range
	Origin	N/A	N/A	China	Full range
	Shade variation	N/A	N/A	V2	Full range

Packing Information

Tile description		Quantityper box	Quantity per m2		Quantity per pallet	
Size (mm)	Texture	Pieces	Pieces	Weight	m2	boxes
300 x 300	In/out Semi polished	11	11.11	21.53 kg	55.44	56
300 x 600	In/out Semi polished	8	5.56	21.53 kg	57.60	40
600 x 600	In/out Semi polished	4	2.78	21.53 kg	57.60	40
264 x 328 Rhomboid	Matt	11	16	1.50 kg	0.00	0
298 x 238 Chevron	Matt	11	17	2.00 kg	0.00	0

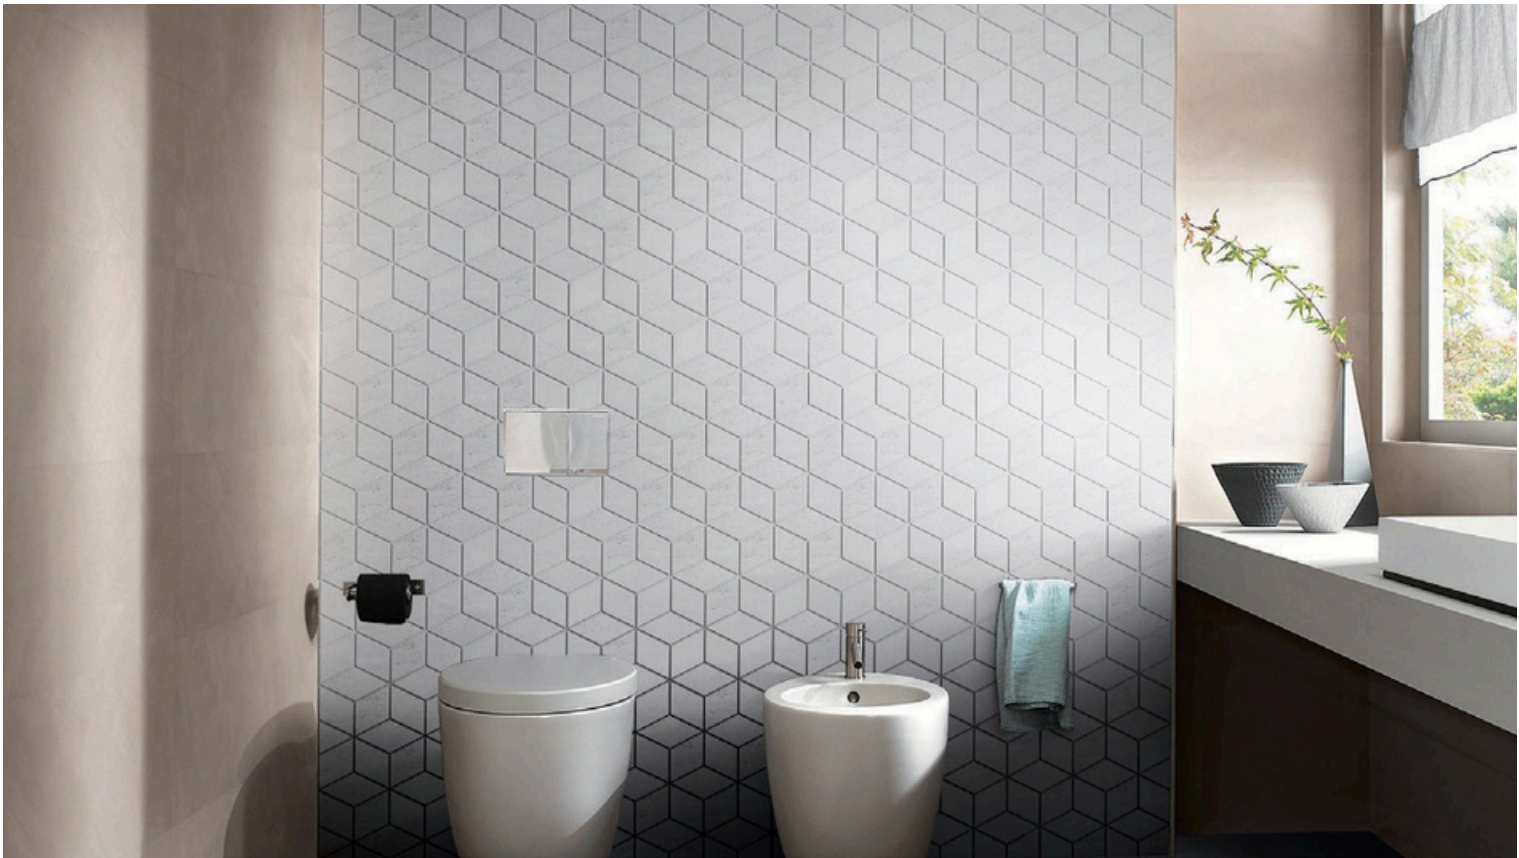

The data and information contained in these specification sheets are indicative only unless stated otherwise. As ColorTile cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.